

## 1-1001: U1W Poli-Glide 3M/2U/BU

**Color:** White

**Plies:** 1

**Nom. OAG:** 0.03" +/- 0.01"

**Fabric:** Monofilament/Polyester

**Top Surface:** Smooth Cover

**Bottom Surface:** Bare

**Compound:** Poly Urethane

**Work Tension:** 30 lbs./PIW

**Elongation:** Less than 1%

**Weight:** 0.02 lbs./PIW

**Minimum Pulley:** 0.1"

**Backflex Min. Pulley Dia.:** 0.2"

**Working Temp. (F):** -4 to 180

**Max. Stocked Width:** 78.75"

**Attributes:** Cross Rigid, Nosebar

Suitable, Anti-Static, Abrasion Resistant,  
Oil Resistant, FDA Compliant

**Hardness:** 90a

**Features:** This belt is a lightweight 1 ply monofilament construction that will negotiate small pulleys. The urethane compound is oil, animal fat and grease resistant. It is easy to clean and will lay flat. Refer to the chemical resistance chart when choosing a cleaning solution. This belt is anti-static. U1W Poli-Glide is used in candy, chocolate and confectionery processing. It is also used in many medium food processing applications such as the cheese, bakery, fish, meat, poultry and vegetable industries.






# Splicing Instructions

**Part Number:** 1-1001

**Part Description:** U1W Poli-Glide 3M/2U/BU

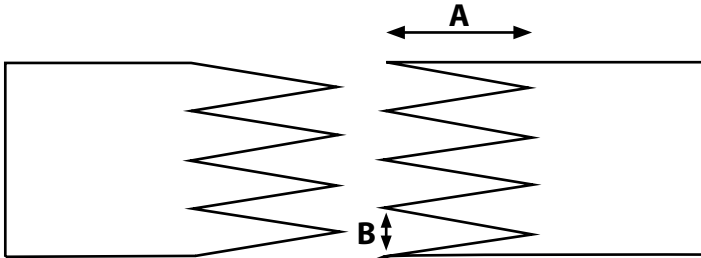

	Imperial	Metric
<b>Finger Length (A):</b>	12"	305 mm
<b>Finger Width (B):</b>	7"	178 mm

### Water Cooled

### Hi-Speed

	Imperial	Metric	Imperial	Metric
<b>Upper Platen Temp:</b>	100 ° F	38 ° C	120 ° F	49 ° C
<b>Bottom Platen Temp:</b>	200 ° F	93 ° C	210 ° F	99 ° C
<b>Pressure:</b>	500 PSI	34.5 bar	300 PSI	20.7 bar
<b>Time:</b>	10:00 m:s	10:00 m:s	15:00 m:s	15:00 m:s

Press Layout	Description	Part # to Order
	Top Heating Platen with equalizing plate	
	Silicone Paper	1020C
	Meltable Foil (optional)	8440C
	Belt	1-1001
	Silicone Paper	1020C
	Molleton Cloth	1023
	Bottom Heating Platen with equalizing plate	

test 3.3.25