



(800) 253-6300

sales@mulhernbelting.com

www.mulhernbelting.com

1-1004: U2W Poli-Glide Standard

Color: White

Plies: 2

Nom. OAG: 0.06" +/- 0.015"

Fabric: Monofilament

Top Surface: Smooth Cover

Bottom Surface: Bare

Compound: Poly Urethane

Work Tension: 50 lbs./PIW

Elongation: Less than 1%

Weight: 0.023 lbs./PIW

Minimum Pulley: 0.1"

Backflex Min. Pulley Dia.: 0.2"

Working Temp. (F): -4 to 180

Max. Stocked Width: 72"

Attributes: Cross Rigid, Abrasion Resistant, FDA Compliant, Oil Resistant, Sliderbed Suitable

Hardness: 90a

Features: This belt is a lightweight 2 ply monofilament construction that will negotiate small pulleys. The urethane compound is oil, animal fat and grease resistant. It is easy to clean and will lay flat. Refer to the chemical resistance chart when choosing a cleaning solution. This belt is formulated for use in metal detectors and is not anti-static. U2W Poli-Glide Standard is used in candy, chocolate and confectionery processing. It is also used in many medium food processing applications such as the cheese, bakery, fish, meat, poultry and vegetable industries. It is also metal detector compliant.






Ph: (800) 253-6300
Fax: (201) 337-6540

sales@mulhernbelting.com
www.mulhernbelting.com

Splicing Instructions

Part Number: 1-1004

Part Description: U2W Poli-Glide Standard

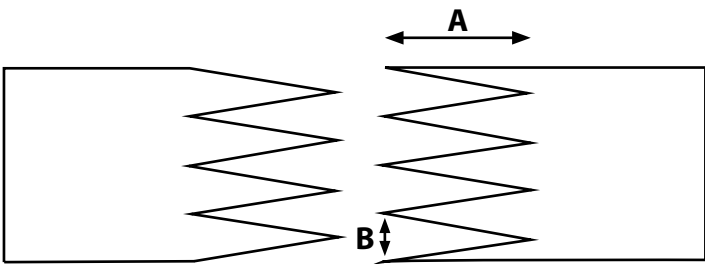

Finger Length (A):
Finger Width (B):


Imperial	Metric
12"	305 mm
7"	178 mm

Water Cooled

Hi-Speed

	Imperial	Metric	Imperial	Metric
Upper Platen Temp:	100 ° F	38 ° C	120 ° F	49 ° C
Bottom Platen Temp:	200 ° F	93 ° C	210 ° F	99 ° C
Pressure:	500 PSI	34.5 bar	300 PSI	20.7 bar
Time:	10:00 m:s	10:00 m:s	15:00 m:s	15:00 m:s

Press Layout

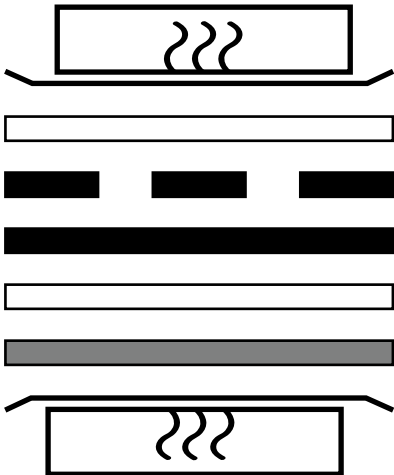

Description

Top Heating Platen with
equalizing plate
Silicone Paper
White Urethane Foil
Belt
Silicone Paper
Molleton Cloth
Bottom Heating Platen
with equalizing plate

Part # to Order

1-1004