



(800) 253-6300

sales@mulhernbelting.com

www.mulhernbelting.com

1-2006: 3 Ply OHGR - HD

Color: White

Plies: 3

Nom. OAG: 0.156" +/- 0.02"

Fabric: Polyester

Top Surface: Smooth Cover

Top Cover Thickness: 0.046"

Bottom Surface: Friction Surface

Compound: NBR

Work Tension: 150 lbs./PIW

Elongation: Less than 2%

Weight: 0.09 lbs./PIW

Minimum Pulley: 3"

Backflex Min. Pulley Dia.: 4.5"

Working Temp. (F): 0 to 250


Max. Stocked Width: 72"

Attributes: FDA Compliant, Oil Resistant,
Sliderbed Suitable

Top Cover Coefficient of Friction: 1.8

Bottom Cover Coefficient of Friction:
0.4

Features: 1-2006 features a special fabric treatment to ensure the highest ply adhesion with the lowest moisture retention. Please refer to the chemical resistance chart before choosing a cleaning solution. 3 Ply OHGR-HD is the heavy duty version of our popular 1-2003. It is used in most all FDA and agricultural applications due to its low moisture absorption and high oil resistance. This belt is very popular in the meat and fish industry.

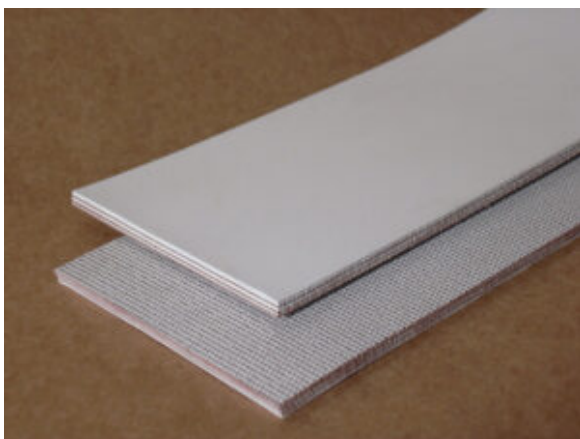




Splicing Instructions

Part Number: 1-2006

Part Description: 3 Ply OHGR - HD

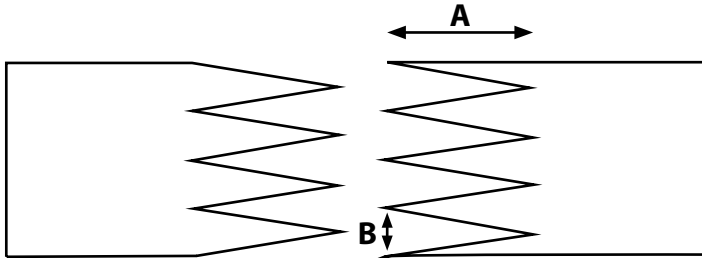

Finger Length (A):

Finger Width (B):

Imperial	Metric
12"	305 mm
7"	178 mm

Water Cooled

Hi-Speed

Upper Platen Temp:

Bottom Platen Temp:

Pressure:

Time:

Imperial	Metric	Imperial	Metric
100 ° F	38 ° C	120 ° F	49 ° C
200 ° F	93 ° C	210 ° F	99 ° C
500 PSI	34.5 bar	300 PSI	20.7 bar
10:00 m:s	10:00 m:s	15:00 m:s	15:00 m:s

Press Layout

Description

Part # to Order

	Top Heating Platen with equalizing plate	
	Silicone Paper	1020C
	Meltable Foil (optional)	8440C
	Belt	1-2006
	Silicone Paper	1020C
	Molleton Cloth	1023
	Bottom Heating Platen with equalizing plate	

test test etst etst etwst