



(800) 253-6300

sales@mulhernbelting.com

www.mulhernbelting.com

1-2901: P2W Poli-Glide 5M/2R/BR

Color: White

Plies: 2

Nom. OAG: 0.07" +/- 0.015"

Fabric: Monofilament/Polyester

Top Surface: Satin Cover

Bottom Surface: Bare

Compound: RAV

Work Tension: 60 lbs./PIW

Elongation: Less than 2%

Weight: 0.05 lbs./PIW

Minimum Pulley: 1"


Backflex Min. Pulley Dia.: 1.5"

Working Temp. (F): 20 to 180

Max. Stocked Width: 72"

Attributes: FDA Compliant, Oil Resistant,
Anti-Static, Sliderbed Suitable

Features: This Belt is a Oil Resistant FDA Accepted Belt. The thin, lightweight carcass is made with cross-rigid monofilament and maintains stability over a wide range of operating conditions. This belt is anit-static. Refer to the Chemical Resistance chart when choosing a cleaning solution. P2W Poli-glide 5M/2R/BR is oil, grease and moisture reistant. It is ideal for low HP conveyors with small pulleys. This belt has excellent stain resistance and is used for meat, poultry, vegetables and bakery applications.

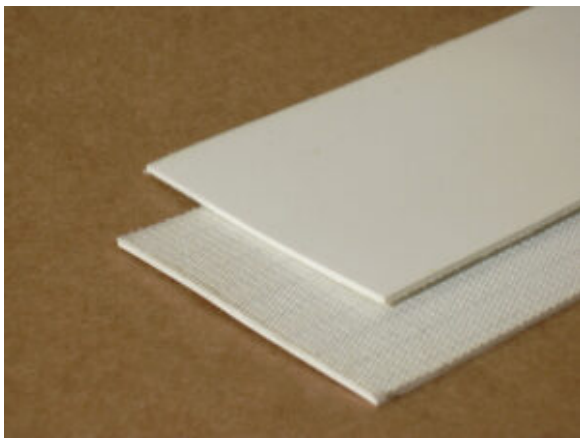




Splicing Instructions

Part Number: 1-2901

Part Description: P2W Poli-Glide 5M/2R/BR

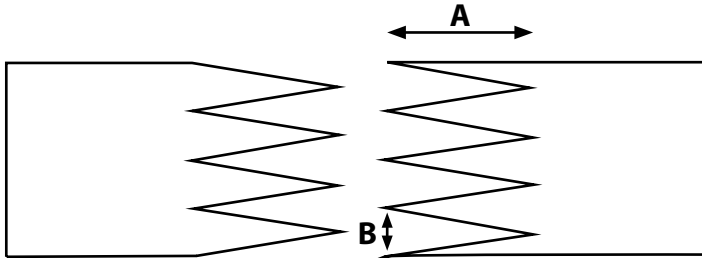

Finger Length (A):

Finger Width (B):

Imperial	Metric
3"	76 mm
3/4"	19 mm

Water Cooled

Hi-Speed

Upper Platen Temp:

Bottom Platen Temp:

Pressure:

Time:

	Imperial	Metric	Imperial	Metric
Upper Platen Temp:	340 ° F	171 ° C	330 ° F	166 ° C
Bottom Platen Temp:	340 ° F	171 ° C	330 ° F	166 ° C
Pressure:	50 PSI	3.4 bar	36 PSI	2.5 bar
Time:	01:00 m:s	01:00 m:s	03:00 m:s	03:00 m:s

Press Layout

Description

Part # to Order

	Top Heating Platen with equalizing plate	
	Silicone Paper	1020C
	Meltable Foil (optional)	8340C
	Belt	1-2901
	Silicone Paper	1020C
	Molleton Cloth	1023
	Bottom Heating Platen with equalizing plate	