



(800) 253-6300

sales@mulhernbelting.com

www.mulhernbelting.com

1-2901: P2W Poli-Glide 5M/2R/BR

Color: White

Plies: 2

Nom. OAG: 0.07" +/- 0.015"

Fabric: Monofilament/Polyester

Top Surface: Satin Cover

Bottom Surface: Bare

Compound: RAV

Work Tension: 60 lbs./PIW

Elongation: Less than 2%

Weight: 0.05 lbs./PIW

Minimum Pulley: 1"

Backflex Min. Pulley Dia.: 1.5"

Working Temp: 20 to 180 °F

Max. Stocked Width: 72"


Attributes: FDA Compliant, Oil Resistant, Anti-Static, Sliderbed Suitable

Features

1-2901 is an oil-resistant, FDA-accepted belt built with a thin, cross-rigid monofilament carcass for consistent stability across wide operating conditions. The construction is anti-static and designed for small pulley diameters.

The belt resists oil, grease, moisture, and staining while maintaining smooth tracking and flexibility.

P2W Poli-Glide 5M/2R/BR is ideal for low-horsepower conveyors in meat, poultry, produce, and bakery applications requiring clean release and high chemical resistance.

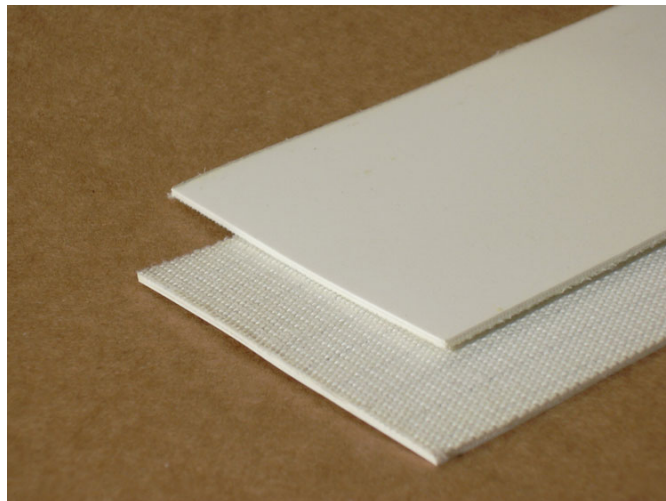




Splicing Instructions

Part Number: 1-2901

Part Description: P2W Poli-Glide 5M/2R/BR

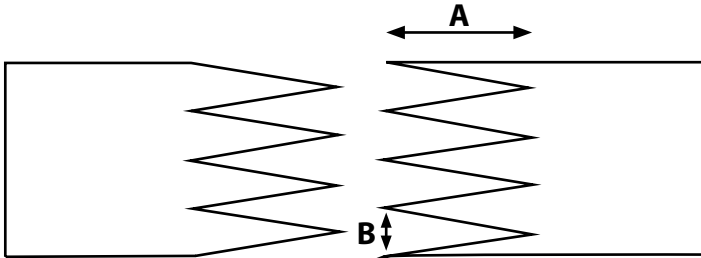

	Imperial	Metric
Finger Length (A):	3"	76 mm
Finger Width (B):	3/4"	19 mm

Water Cooled

Hi-Speed

	Imperial	Metric	Imperial	Metric
Upper Platen Temp:	340 ° F	171 ° C	330 ° F	166 ° C
Bottom Platen Temp:	340 ° F	171 ° C	330 ° F	166 ° C
Pressure:	50 PSI	3.4 bar	36 PSI	2.5 bar
Time:	01:00 m:s	01:00 m:s	03:00 m:s	03:00 m:s

Press Layout

Description

Part # to Order

	Top Heating Platen with equalizing plate	
	Silicone Paper	1020C
	Meltable Foil (optional)	8340C
	Belt	1-2901
	Silicone Paper	1020C
	Molleton Cloth	1023
	Bottom Heating Platen with equalizing plate	