



(800) 253-6300

sales@mulhernbelting.com

www.mulhernbelting.com

1-2911: RAV2 W100 COS

Color: White

Plies: 2

Nom. OAG: 0.112" +/- 0.015"

Fabric: Polyester

Top Surface: Smooth Cover (Dull Finish)

Bottom Surface: Friction Surface

Compound: RAV

Work Tension: 100 lbs./PIW

Elongation: Less than 2%

Weight: 0.065 lbs./PIW

Minimum Pulley: 1.5"


Backflex Min. Pulley Dia.: 2.25"

Working Temp. (F): 20 to 180

Max. Stocked Width: 72"

Attributes: FDA Compliant, Oil Resistant,
Sliderbed Suitable

Features: 1-2911 features the popular RAV compound on a low stretch, stable polyester carcass. The RAV compound blends the economical benefits of PVC and the universal benefits of NBR. RAV2 W100 COS can be used anywhere an oil-resistant light duty food belt is needed. It is a good belt for nut and seed sorting, meat and poultry applications and in vegetable and fruit processing.

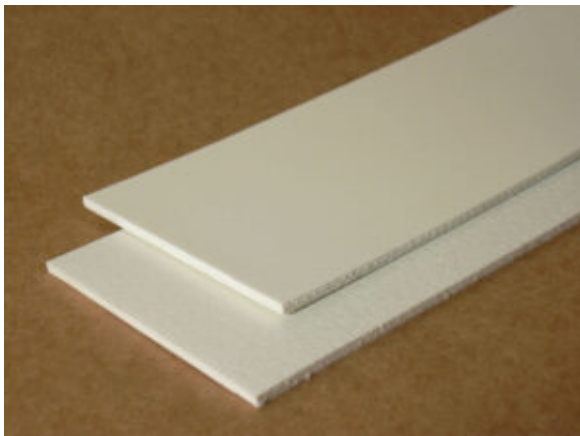




Splicing Instructions

Part Number: 1-2911

Part Description: RAV2 W100 COS

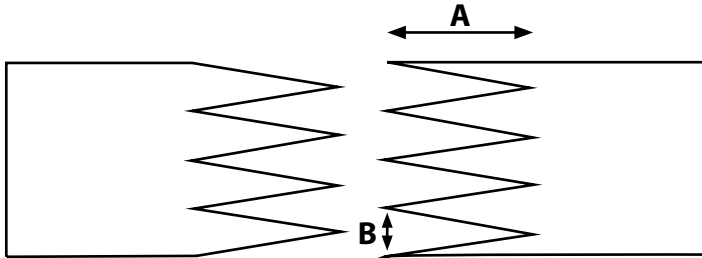

Finger Length (A):

Finger Width (B):

Imperial	Metric
3"	76 mm
3/4"	19 mm

Water Cooled

Hi-Speed

Upper Platen Temp:

Bottom Platen Temp:

Pressure:

Time:

	Imperial	Metric	Imperial	Metric
Upper Platen Temp:	340 ° F	171 ° C	330 ° F	166 ° C
Bottom Platen Temp:	340 ° F	171 ° C	330 ° F	166 ° C
Pressure:	50 PSI	3.4 bar	36 PSI	2.5 bar
Time:	01:00 m:s	01:00 m:s	03:00 m:s	03:00 m:s

Press Layout

Description

Part # to Order

	Top Heating Platen with equalizing plate	
	Silicone Paper	1020C
	Meltable Foil (optional)	8340C
	Belt	1-2911
	Silicone Paper	1020C
	Molleton Cloth	1023
	Bottom Heating Platen with equalizing plate	