



(800) 253-6300

sales@mulhernbelting.com

www.mulhernbelting.com

1-2971: R2W Poli-Glide 8M/10R/BR

Color: White

Plies: 2

Nom. OAG: 0.09" +/- 0.02"

Fabric: Monofilament

Top Surface: Matte

Bottom Surface: Bare

Compound: RAV

Work Tension: 100 lbs./PIW

Elongation: Less than 2%

Weight: 0.05 lbs./PIW

Minimum Pulley: 2"


Backflex Min. Pulley Dia.: 3"

Working Temp. (F): 20 to 180

Max. Stocked Width: 78.75"

Attributes: Anti-Static, Cross Rigid, FDA Compliant, Sliderbed Suitable, Oil Resistant

Features: This belt features the popular RAV compound in a low stretch, stable and static dissipating carcass. The RAV compound blends the economical benefits of PVC and the universal benefits of NBR. This belt is anti-static. Refer to the chemical resistance chart when choosing a cleaning solution. R2W Poli-Glide 8M/10R/BR can be used almost anywhere a light duty food belt is needed. The belt qualities include oil, grease and moisture resistance. The thermoplastic component lends itself to a wide range of fabrications.

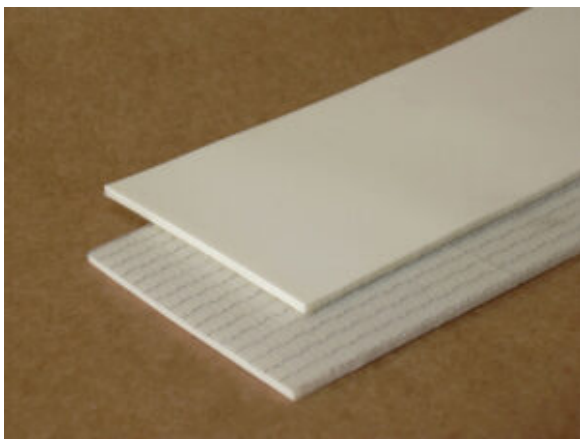




Splicing Instructions

Part Number: 1-2971

Part Description: R2W Poli-Glide 8M/10R/BR

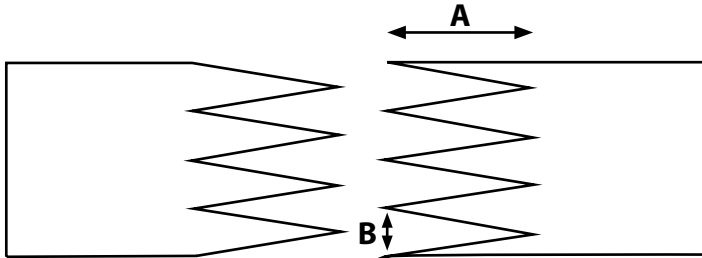

Finger Length (A):

Finger Width (B):

Imperial	Metric
3"	76 mm
3/4"	19 mm

Water Cooled

Hi-Speed

Upper Platen Temp:

Bottom Platen Temp:

Pressure:

Time:

	Imperial	Metric	Imperial	Metric
Upper Platen Temp:	340 ° F	171 ° C	330 ° F	166 ° C
Bottom Platen Temp:	340 ° F	171 ° C	330 ° F	166 ° C
Pressure:	50 PSI	3.4 bar	36 PSI	2.5 bar
Time:	01:00 m:s	01:00 m:s	03:00 m:s	03:00 m:s

Press Layout

Description

Part # to Order

	Top Heating Platen with equalizing plate	
	Silicone Paper	1020C
	Meltable Foil (optional)	8340C
	Belt	1-2971
	Silicone Paper	1020C
	Molleton Cloth	1023
	Bottom Heating Platen with equalizing plate	