



(800) 253-6300

sales@mulhernbelting.com

www.mulhernbelting.com

2-1122: B1200 CBS

Color: Black

Plies: 1

Nom. OAG: 0.155" +/- 0.02"

Fabric: Interwoven Polyester

Top Surface: Smooth Cover

Bottom Surface: Smooth Cover

Compound: PVC

Work Tension: 120 lbs./PIW

Elongation: Less than 2%

Weight: 0.08 lbs./PIW

Minimum Pulley: 3"

Backflex Min. Pulley Dia.: 4.5"

Working Temp. (F): 0 to 180


Max. Stocked Width: 72"

Hardness: 60A

Top Cover Coefficient of Friction: 0.83

Bottom Cover Coefficient of Friction:
0.83

Features: 2-1122 features PVC covers on both sides. The tightly woven polyester resists fraying and is stretch resistant. B1200 CBS is popular in live roller applications as well as a light duty bucket elevator belt. It is popular in the peanut and coffee industry. This belt is not for use in slider belt applications.

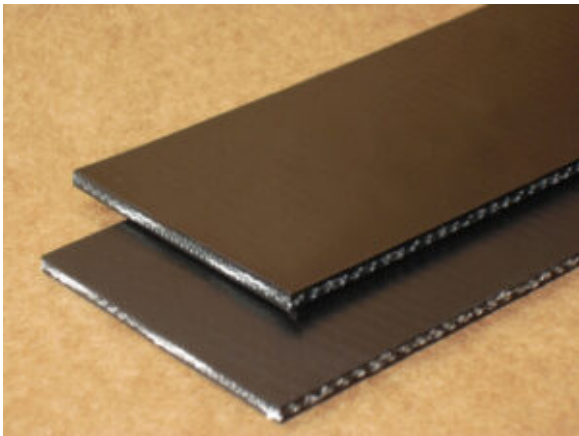



Splicing Instructions

Part Number: 2-1122

Part Description: B1200 CBS



Finger Length (A):

Finger Width (B):

Imperial	Metric
3"	76 mm
3/4"	19 mm

Water Cooled

Hi-Speed

	Imperial	Metric	Imperial	Metric
Upper Platen Temp:	340 ° F	171 ° C	340 ° F	171 ° C
Bottom Platen Temp:	340 ° F	171 ° C	340 ° F	171 ° C
Pressure:	50 PSI	3.4 bar	36 PSI	2.5 bar
Time:	02:00 m:s	02:00 m:s	05:00 m:s	05:00 m:s

Press Layout

Description

Part # to Order

	Top Heating Platen with equalizing plate	
	Teflon	6-3000
	Meltable Foil (optional)	8341C
	Belt	2-1122
	Meltable Foil (optional)	8341C
	Teflon	6-3000
	Bottom Heating Platen with equalizing plate	

For high stress applications splice with reinforcing fabric.