



(800) 253-6300

sales@mulhernbelting.com

www.mulhernbelting.com

2-2125: W1000 PVC Rough Top - Hi

Color: White

Plies: 1

Nom. OAG: 0.31" +/- 0.03"

Fabric: Interwoven Polyester

Top Surface: Hemp Impression Rough Top

Bottom Surface: Friction Surface

Compound: PVC

Work Tension: 100 lbs./PIW

Elongation: Less than 2%

Weight: 0.1 lbs./PIW

Minimum Pulley: 3"

Backflex Min. Pulley Dia.: 4.5"

Working Temp: 0 to 180 °F

Max. Stocked Width: 72"


Attributes: Sliderbed Suitable

Recessed OAG: 0.12"

Features

2-2125 uses a durable interwoven carcass with a hemp-impression rough-top cover designed for reliable product grip on moderate inclines. The construction is stable, easy to track, and compatible with standard fabrication. (Note: rough-top must be recessed for lacing; use Recessed OAG.)

This belt is commonly used as a general-purpose incline solution in light industrial and packaging applications and is FDA-compliant for certain food-handling environments.

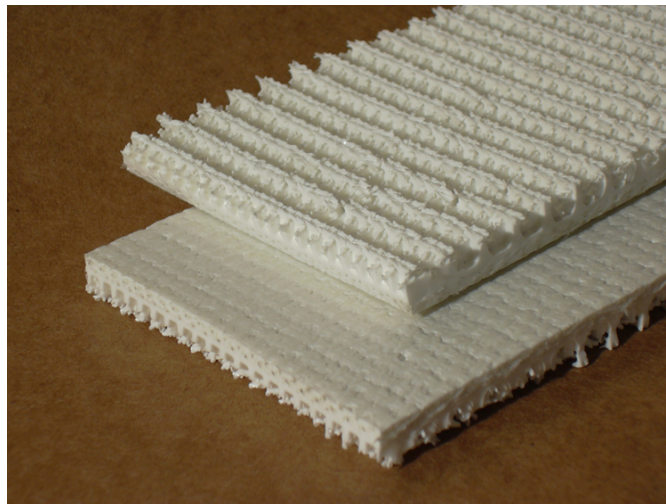




Splicing Instructions

Part Number: 2-2125

Part Description: W1000 PVC Rough Top - Hi

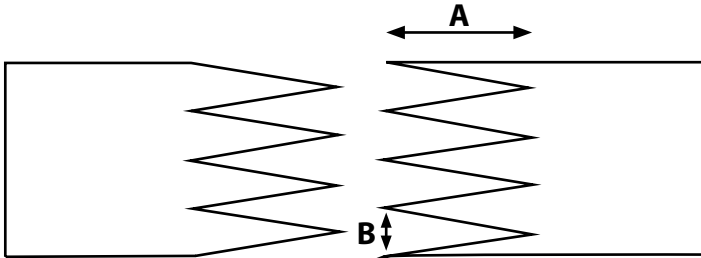

	Imperial	Metric
Finger Length (A):	3"	76 mm
Finger Width (B):	3/4"	19 mm

Water Cooled

Hi-Speed

	Imperial	Metric	Imperial	Metric
Upper Platen Temp:	340 ° F	171 ° C	330 ° F	166 ° C
Bottom Platen Temp:	340 ° F	171 ° C	330 ° F	166 ° C
Pressure:	50 PSI	3.4 bar	36 PSI	2.5 bar
Time:	01:00 m:s	01:00 m:s	03:00 m:s	03:00 m:s

Press Layout	Description	Part # to Order
	Top Heating Platen with equalizing plate	
	Impression Pad	
	Meltable Foil (optional)	8340C
	Belt	2-2125
	Teflon	6-3000
	Bottom Heating Platen with equalizing plate	

For high stress applications splice with reinforcing fabric.