

## 2-2125: W1000 PVC Rough Top - Hi

**Color:** White

**Plies:** 1

**Nom. OAG:** 0.31" +/- 0.03"

**Recessed OAG:** 0.12"

**Fabric:** Interwoven Polyester

**Top Surface:** Hemp Impression Rough  
Top

**Bottom Surface:** Friction Surface

**Compound:** PVC

**Work Tension:** 100 lbs./PIW

**Elongation:** Less than 2%

**Weight:** 0.1 lbs./PIW

**Minimum Pulley:** 3"


**Backflex Min. Pulley Dia.:** 4.5"

**Working Temp. (F):** 0 to 180

**Max. Stocked Width:** 72"

**Attributes:** Sliderbed Suitable

**Features:** 2-2125 features the popular interwoven carcass with a hemp impression rough top cover. Refer to the chemical resistance chart when choosing a cleaning solution. NOTE--The rough top impression must be recessed to use lacing. Use Recessed OAG for Lacing Recommendation. W1000 PVC Rough Top-HI can be used as a general purpose incline belt where the incline is moderate. It is FDA compliant for use in some food applications.

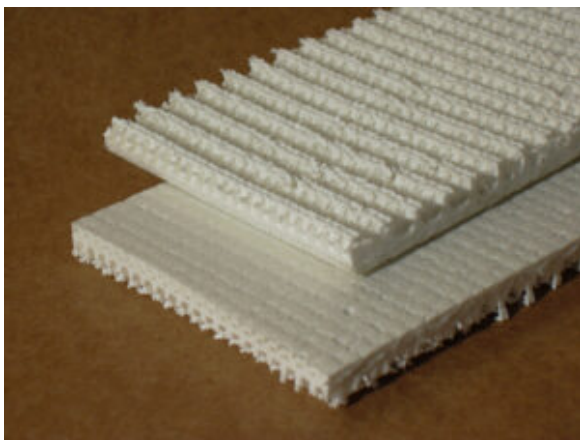



# Splicing Instructions

**Part Number:** 2-2125

**Part Description:** W1000 PVC Rough Top - Hi



**Finger Length (A):**

**Finger Width (B):**

Imperial	Metric
3"	76 mm
3/4"	19 mm

## Water Cooled

## Hi-Speed

**Upper Platen Temp:**

**Bottom Platen Temp:**

**Pressure:**

**Time:**

	Imperial	Metric	Imperial	Metric
Upper Platen Temp:	340 ° F	171 ° C	330 ° F	166 ° C
Bottom Platen Temp:	340 ° F	171 ° C	330 ° F	166 ° C
Pressure:	50 PSI	3.4 bar	36 PSI	2.5 bar
Time:	01:00 m:s	01:00 m:s	03:00 m:s	03:00 m:s

## Press Layout

## Description

## Part # to Order

	Top Heating Platen with equalizing plate	
	Impression Pad	
	Meltable Foil (optional)	8340C
	Belt	2-2125
	Teflon	6-3000
	Bottom Heating Platen with equalizing plate	

For high stress applications splice with reinforcing fabric.