



(800) 253-6300

sales@mulhernbelting.com

www.mulhernbelting.com

2-2201: W2000 COS

Color: White

Plies: 1

Nom. OAG: 0.21" +/- 0.02"

Fabric: Interwoven Polyester

Top Surface: Smooth PVC

Bottom Surface: Friction Surface

Compound: PVC

Work Tension: 200 lbs./PIW

Elongation: Less than 2%

Weight: 0.11 lbs./PIW

Minimum Pulley: 4"

Backflex Min. Pulley Dia.: 6"

Working Temp: 0 to 180 °F

Max. Stocked Width: 72"

Attributes: FDA Compliant, Oil Resistant,
Sliderbed Suitable

Top Cover CoF: 0.9

Bottom Cover CoF: 0.8

Features

2-2201 features a smooth, oil-resistant PVC cover reinforced by a tightly interwoven polyester carcass, providing a stable, low-stretch construction that lies flat and tracks reliably. The belt offers moderate oil resistance, performing well in food-handling environments where exposure to vegetable oils, moisture, or processing fluids occurs. It also accepts specialty fabrication easily, making it suitable for cleats, guides, and other tailored modifications. For best results, consult the chemical resistance chart when selecting cleaning solutions.

W2000 COS is used as a heavy-duty, general-purpose food-handling belt and may be applied in certain chicken and meat-processing operations depending on specific conditions. Its durability and adaptability make 2-2201 a versatile option for a range of medium-duty food-processing applications.






Splicing Instructions

Part Number: 2-2201

Part Description: W2000 COS

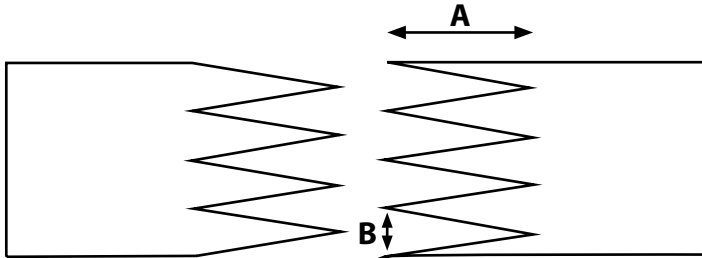

	Imperial	Metric
Finger Length (A):	3"	76 mm
Finger Width (B):	3/4"	19 mm

Water Cooled

Hi-Speed

	Imperial	Metric	Imperial	Metric
Upper Platen Temp:	335 ° F	168 ° C	335 ° F	168 ° C
Bottom Platen Temp:	335 ° F	168 ° C	335 ° F	168 ° C
Pressure:	50 PSI	3.4 bar	36 PSI	2.5 bar
Time:	02:00 m:s	02:00 m:s	05:00 m:s	05:00 m:s

Press Layout

Description

Part # to Order

	Top Heating Platen with equalizing plate	
	Teflon	6-3000
	Meltable Foil (optional)	8340C
	Belt	2-2201
	Meltable Foil (optional)	8340C
	Teflon	6-3000
	Bottom Heating Platen with equalizing plate	

For high stress applications splice with reinforcing fabric.