



(800) 253-6300

sales@mulhernbelting.com

www.mulhernbelting.com

3-1560: P2B Mono-Tote

Color: Black

Plies: 2

Nom. OAG: 0.09" +/- 0.01"

Fabric: Polyester

Top Surface: Longitudinal Groove

Top Cover Thickness: 0.039"

Bottom Surface: Bare

Compound: PVC

Work Tension: 86 lbs./PIW

Elongation: Less than 2%

Weight: 0.043 lbs./PIW

Minimum Pulley: 1.2"

Backflex Min. Pulley Dia.: 2"


Working Temp. (F): 14 to 140

Max. Stocked Width: 118.11"

Attributes: Sliderbed Suitable, Fire Retardant, Low Noise, Anti-Static

Hardness: 40a

Features: P2B Mono-Tote features an exceptionally soft compound with molded grooves that self clean when going around pulleys. This belt is Anti-Static and flame retardant conforming to ISO 340. 3-1560 is recommended wherever a high grip incline belt is needed such as the conveying of totes, and acceleration belt, decline belt, gapping belt, incline belt, induction belt, line belt and sorting belt. It has been developed for low noise.

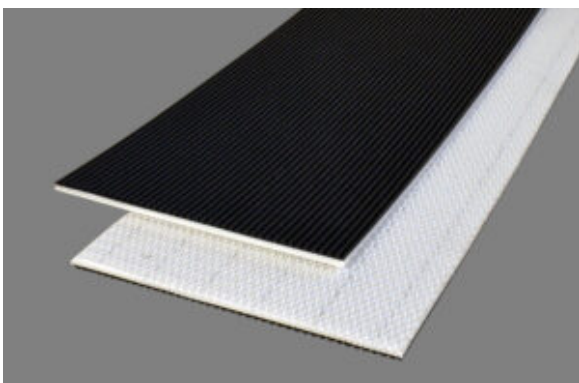




Splicing Instructions

Part Number: 3-1560

Part Description: P2B Mono-Tote

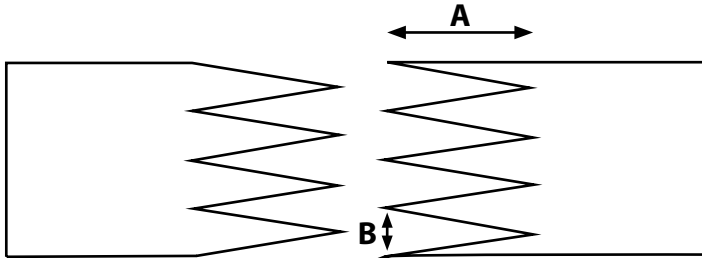

Finger Length (A):

Finger Width (B):

Imperial	Metric
3"	76 mm
3/4"	19 mm

Water Cooled

Hi-Speed

Upper Platen Temp:

Bottom Platen Temp:

Pressure:

Time:

	Imperial	Metric	Imperial	Metric
Upper Platen Temp:	340 ° F	171 ° C	340 ° F	171 ° C
Bottom Platen Temp:	340 ° F	171 ° C	340 ° F	171 ° C
Pressure:	50 PSI	3.4 bar	36 PSI	2.5 bar
Time:	01:00 m:s	01:00 m:s	03:00 m:s	03:00 m:s

Press Layout

Description

Part # to Order

	Top Heating Platen with equalizing plate	
	Impression Pad	
	Meltable Foil (optional)	8341C
	Belt	3-1560
	Teflon	6-3000
	Bottom Heating Platen with equalizing plate	