(800) 253-6300
sales@mulhernbelting.com
www.mulhernbelting.com

3-2103: 3 Ply Black V-Top

Color: Black
Plies: 3
Nom. OAG: 0.322" +/- 0.02"
Fabric: Cotton/Polyester
Top Surface: V-Top pattern
Bottom Surface: Skim
Compound: SBR
Work Tension: 90 lbs./PIW
Elongation: Less than 2%
Weight: 0.135 lbs./PIW

Minimum Pulley: 2.5"
Backflex Min. Pulley Dia.: 3.75"
Working Temp: -25 to 250 °F
Max. Stocked Width: 60"
Top Cover CoF: 1
Bottom Cover CoF: 0.3
Recessed OAG: 0.14"

Features

3-Ply Black V-Top provides strong incline capability for general-purpose products that require reliable grip without marking. The molded V-shaped surface is designed to self-clean as it travels over end pulleys, shedding debris and maintaining traction.

This construction is ideal when a traditional hemp impression rough-top will not perform adequately—particularly in applications involving moisture, light contamination, or product slippage. It is widely used in bottling, box handling, packaging, and distribution where consistent incline performance is critical.
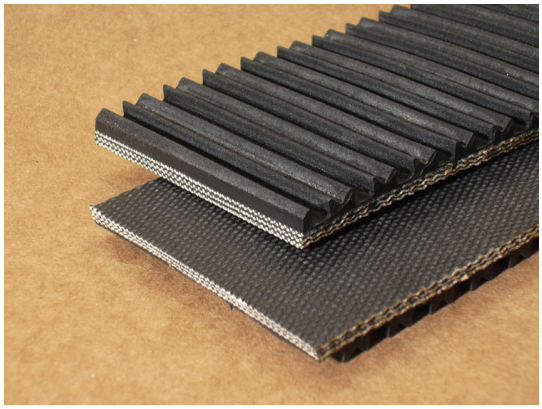
(Note: V-top surfaces must be recessed to use mechanical lacing; Recessed OAG is recommended.)