



(800) 253-6300

[sales@mulhernbelting.com](mailto:sales@mulhernbelting.com)

[www.mulhernbelting.com](http://www.mulhernbelting.com)

## 3-3520: B2000 Crescent Top

**Color:** Black

**Plies:** 1

**Nom. OAG:** 0.3" +/- 0.03"

**Recessed OAG:** 0.185"

**Fabric:** Interwoven Polyester

**Top Surface:** Crescent Impression

**Bottom Surface:** Brushed

**Compound:** PVC

**Work Tension:** 200 lbs./PIW

**Elongation:** Less than 2%

**Weight:** 0.125 lbs./PIW

**Minimum Pulley:** 4"

**Backflex Min. Pulley Dia.:** 6"

**Working Temp. (F):** 0 to 180


**Max. Stocked Width:** 72"

**Attributes:** Troughable, Sliderbed  
Suitable

**Top Cover Coefficient of Friction:** 1.1

**Bottom Cover Coefficient of Friction:**  
0.8

**Features:** 3-3520 features the popular interwoven carcass with an 1/8" high half moon (crescent) impression. The belt has a brushed bottom for a low coefficient of friction. The PVC compound is oil resistant. NOTE--The crescent impression must be recessed to use lacing. The OAG includes the profile. Use Recessed OAG for Lacing Recommendation. B2000 Crescent Top is very popular in the agricultural industry for the movement of bulk materials and in the post office to move small packages.

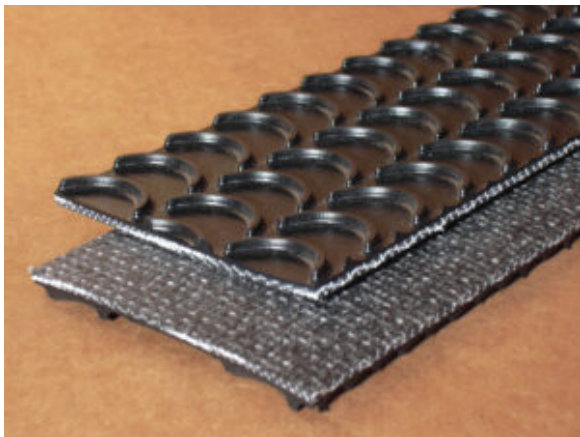




# Splicing Instructions

**Part Number:** 3-3520

**Part Description:** B2000 Crescent Top

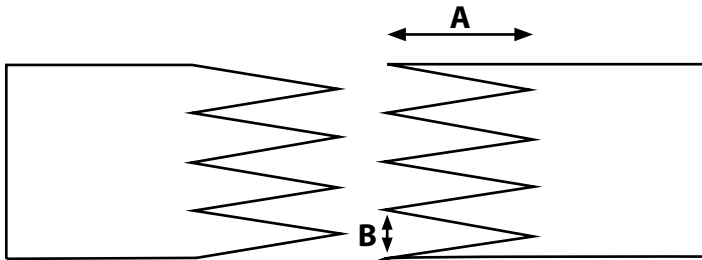

**Finger Length (A):**

**Finger Width (B):**

Imperial	Metric
3"	76 mm
3/4"	19 mm

## Water Cooled

## Hi-Speed

**Upper Platen Temp:**

**Bottom Platen Temp:**

**Pressure:**

**Time:**

	Imperial	Metric	Imperial	Metric
Upper Platen Temp:	340 ° F	171 ° C	340 ° F	171 ° C
Bottom Platen Temp:	340 ° F	171 ° C	340 ° F	171 ° C
Pressure:	50 PSI	3.4 bar	36 PSI	2.5 bar
Time:	01:00 m:s	01:00 m:s	03:00 m:s	03:00 m:s

## Press Layout

## Description

## Part # to Order

	Top Heating Platen with equalizing plate	
	Impression Pad	
	Meltable Foil (optional)	8341C
	Belt	3-3520
	Teflon	6-3000
	Bottom Heating Platen with equalizing plate	

For high stress applications splice with reinforcing fabric.