

## 4-4003: P2B Mono-Glide 8M/5P/BP

**Color:** Black

**Plies:** 2

**Nom. OAG:** 0.075" +/- 0.015"

**Fabric:** Polyester x Monofilament

**Top Surface:** Smooth Cover (Dull Finish)

**Bottom Surface:** Bare

**Compound:** PVC

**Work Tension:** 60 lbs./PIW

**Elongation:** Less than 1%

**Weight:** 0.04 lbs./PIW

**Minimum Pulley:** 1"


**Backflex Min. Pulley Dia.:** 1.5"

**Working Temp. (F):** 20 to 180

**Max. Stocked Width:** 118.11"

**Attributes:** Sliderbed Suitable, Anti-Static, Cross Rigid, Low Noise

**Features:** This belt features a ply of monofilament and a balancing ply. This combination results in a non-curling, stable, positive tracking belt. This belt is also anti-static. P2B Mono-Glide 8M/5P/BP is the most popular checkout counter belt. It is also popular with the conveying of small parts, treadmills and packaging machines.

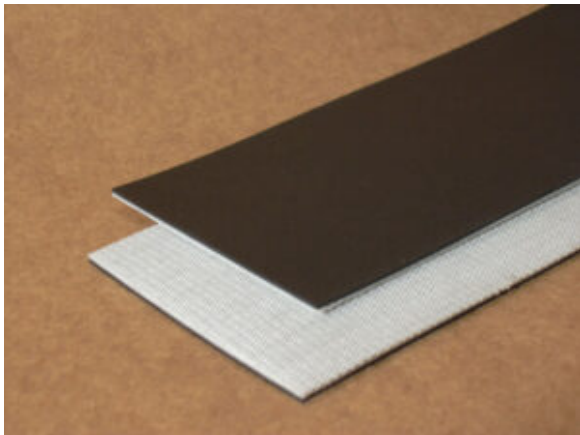




# Splicing Instructions

**Part Number:** 4-4003

**Part Description:** P2B Mono-Glide 8M/5P/BP

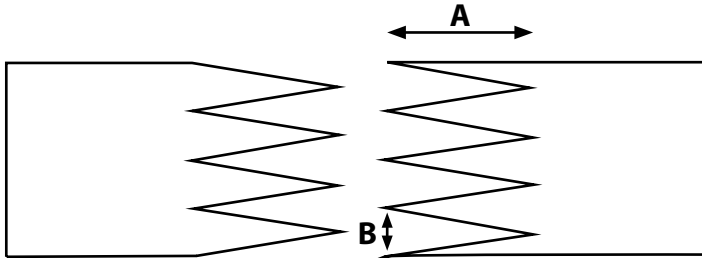

**Finger Length (A):**

**Finger Width (B):**

Imperial	Metric
3"	76 mm
3/4"	19 mm

## Water Cooled

## Hi-Speed

**Upper Platen Temp:**

**Bottom Platen Temp:**

**Pressure:**

**Time:**

	Imperial	Metric	Imperial	Metric
Upper Platen Temp:	340 ° F	171 ° C	340 ° F	171 ° C
Bottom Platen Temp:	340 ° F	171 ° C	340 ° F	171 ° C
Pressure:	50 PSI	3.4 bar	36 PSI	2.5 bar
Time:	01:00 m:s	01:00 m:s	03:00 m:s	03:00 m:s

## Press Layout

## Description

## Part # to Order

	Top Heating Platen with equalizing plate	
	Teflon	6-3000
	Meltable Foil (optional)	8341C
	Belt	4-4003
	Teflon	6-3000
	Bottom Heating Platen with equalizing plate	