(800) 253-6300
sales@mulhernbelting.com
www.mulhernbelting.com

5-2502: 2 Ply 220 1/8 x Bare MOR

Color: Black
Plies: 2
Nom. OAG: 0.219" +/- 0.02"
Fabric: Polyester
Top Surface: Smooth Cover
Bottom Surface: Bare
Compound: MOR
Work Tension: 220 lbs./PIW
Elongation: Less than 4%
Weight: 0.125 lbs./PIW

Minimum Pulley: 10"
Working Temp: -20 to 225 °F
Max. Stocked Width: 72"
Attributes: Sliderbed Suitable, Troughable, Oil Resistant, Oil Resistance ASTM D471 70C/72hrs/IRM903 < 20% Swell
Hardness: 65a
Top Cover Thickness: 0.125"
Recessed OAG: 0.157"

Features

This belt features a rugged, abrasion-resistant top cover paired with a hefty carcass designed to withstand high impact while maintaining reliable fastener retention. Its durable construction performs well in demanding environments where shock loading, scraping, and repeated contact with rough materials are common. The belt is also moderately oil-resistant, offering added protection in applications where incidental exposure to lubricants or resins may occur.
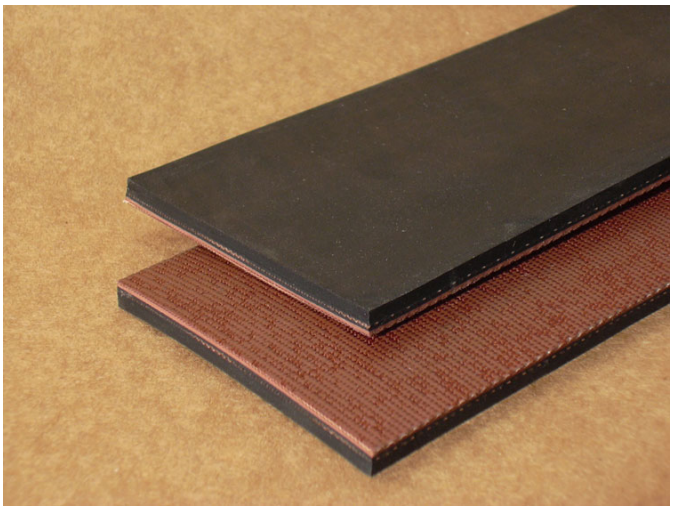
220 1/8″ x Bare MOR is widely used in the lumber industry and any operation requiring a tough, abrasion-resistant belt with a friction-bottom surface. Its strength, resilience, and dependable gripping characteristics make it a solid performer in heavy-duty industrial conveying.