(800) 253-6300
sales@mulhernbelting.com
www.mulhernbelting.com

5-3833: 3 Ply 330 1/4 x 1/16 HT

Color: Black
Plies: 3
Nom. OAG: 0.48" +/- 0.03"
Fabric: Polyester/Nylon
Top Surface: Smooth Cover
Bottom Surface: Smooth Cover
Compound: EPDM
Work Tension: 330 lbs./PIW
Elongation: Less than 4%
Weight: 0.26 lbs./PIW

Minimum Pulley: 12"
Working Temp: -20 to 400 °F
Max. Stocked Width: 72"
Attributes: Heat Resistant / High Temp, Troughable
Hardness: 65a
Top Cover Thickness: 0.25"
Bottom Cover Thickness: 0.063"
Recessed OAG: 0.355"

Features

5-3833 is engineered for high-heat service, handling temperatures up to 350°F (fines) and 400°F (lumps). It resists cracking, hardening, and ozone damage under prolonged heat exposure.
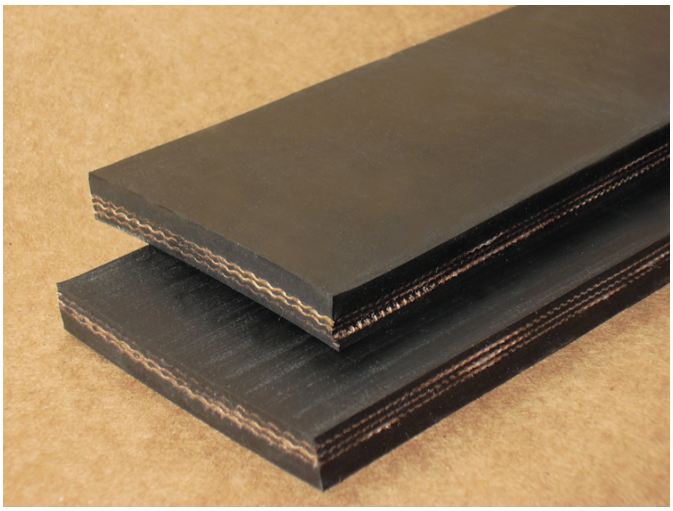
The 330 1/4″ × 1/16″ HT design is well-suited for foundries, kiln-feed systems, and other severe high-temperature material handling operations.