



(800) 253-6300

sales@mulhernbelting.com

www.mulhernbelting.com

5-6731-S25: S25 Milling Chevron, CW/28.625", 3 Ply 225, 1/8 x 1/16, RMA1

Color: Black

Plies: 3

Nom. OAG: 1.33" +/- 0.03"

Fabric: Polyester/Nylon

Top Surface: Chevron Impression

Bottom Surface: Smooth Cover

Compound: SBR Grade 1

Work Tension: 225 lbs./PIW

Elongation: Less than 2%

Weight: 0.217 lbs./PIW

Minimum Pulley: 10"

Working Temp: -20 to 250 °F

Max. Stocked Width: 55.11"

Attributes: Abrasion Resistant

Hardness: 65a


Top Cover Thickness: 0.125"

Bottom Cover Thickness: 0.063"

Recessed OAG: 0.33"

Features

5-6731-S25 incorporates a wider 28.625" molded chevron pattern for enhanced carrying capacity on high-demand milling machines. Its Grade 1 rubber compound and 3-ply 225 construction ensure durability, reduced slippage, and reliable performance across the toughest applications. Available open-ended, endless, or laced.

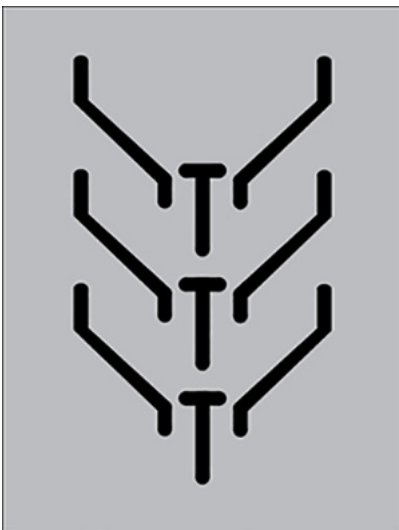


Oakland, NJ
Atlanta, GA
Fairfield, OH
Michigan City, IN
Kansas City, MO

SCAN
B
M
C
FOR

5-6731-S25

S25 Milling Chevron, CW/29.5"; 3 Ply 225, 1/8 x 1/16, RMA1

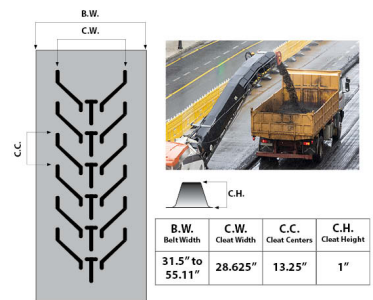

P: 800-253-6300 F: 201-337-6540 sales@mulhernbelting.com www.mulhernbelting.com