(800) 253-6300
sales@mulhernbelting.com
www.mulhernbelting.com

9-1001: APC Special .187 OAG - Box

Color: Black
Plies: 1
Nom. OAG: 0.187" +/- 0.03"
Fabric: Polyester
Top Surface: Smooth PVC
Bottom Surface: Modified A-Section V-Guide Center Bottom
Compound: PVC
Work Tension: 150 lbs./PIW
Weight: 130 lbs./PIW

Minimum Pulley: 3"
Working Temp: 0 to 180 °F
Recessed OAG: 0"

Features

9-1001 features a modified A-section V-guide designed for alignment-critical conveying. The belt is manufactured to a precise thickness for compatibility with guided live-roller systems.

Its construction provides stable tracking, smooth engagement, and dependable performance in continuous-duty applications.
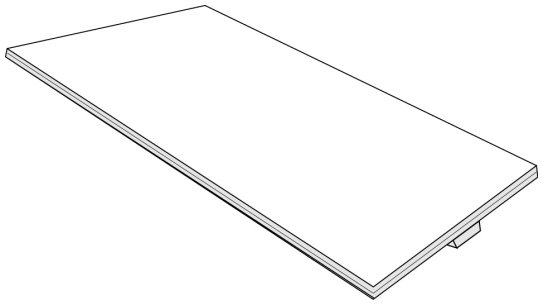
This belt is packaged in standard 4″ wide x 250-ft coils and is engineered specifically for guided live-roller environments where precise navigation and long service life are required.