





BUCKET ELEVATOR BELTING

for agricultural
& industrial conveyors

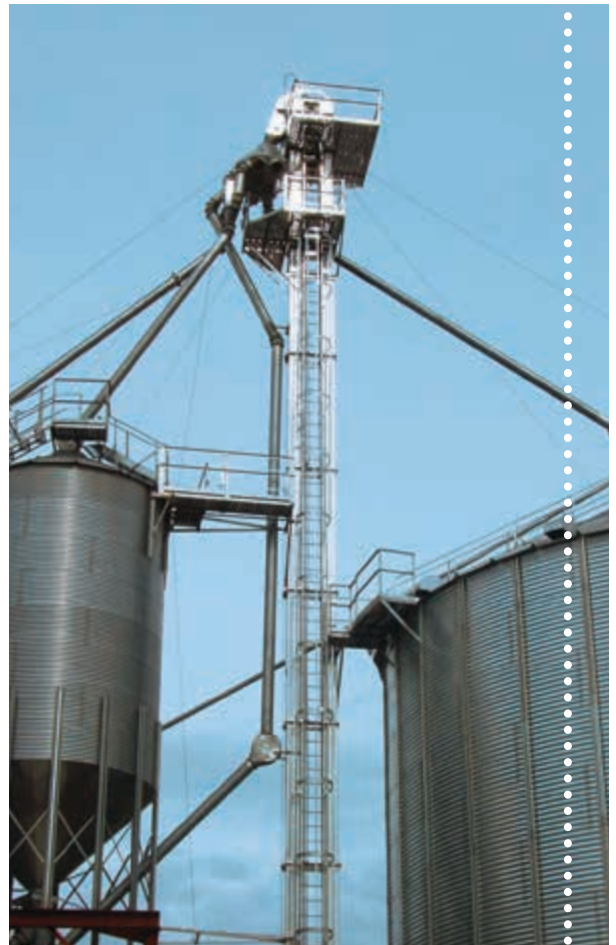

MULHERN
BELTING, INC.



Are you conveying grains, feed, fertilizer, minerals, sugar, flour, corn, coffee, clay, sand, aggregate, coal, chemicals, cement, ores or any other material vertically in buckets?



Insist on Mulhern Belting's high performance Bucket Elevator belt for low stretch, abrasion endurance and resistance to moisture, mildew and rot.



Our premium Bucket Elevator belting features exceptional bolt retention, belt strength and resists minimum pulley flex fatigue.

.....
sales@mulhernbelting.com
mulhernbelting.com
.....



**MULHERN
BELTING, INC.**

.....
Phone: 1-800-253-6300
Fax: 1-201-337-6540
.....



5-3335



5-2335



5-2731



5-4831



2-1452



2-2201





2-1352

Dozens of standard punch configurations are available. Need a custom pattern? Mulhern Belting is ready for the job on short lead times.





P-1/B-1

P-2/B-2




P-3/B-3

P-4/B-4



P-5/B-5

P-7/B-6



P-8/B-7

P-9/B-8



CONTACT OUR EXPERIENCED AND KNOWLEDGEABLE SALES STAFF FOR A QUOTE TODAY!

Part #	Description	Nominal OAG (in.)	Bucket Elevator Safe Work Load PIW (Mechanical Fastener)	Bucket Elevator Recommended Minimum Pulley Diameter (% of rated belt tension) (in.)			Maximum Elevator Bucket Projection (in.)	OSHA	Flame Retardant	Oil Resistant	Temp. Range
				81% - 100%	61% - 80%	<60%					
2-1202	B2000 CBS	0.250	185	6	6	6	6	Yes	Yes	No	0F to 180F
2-2202	W2000 CBS	0.250	185	6	6	6	6	Yes	Yes	Yes	0F to 180F
2-1352	B3500 CBS	0.310	280	8	8	8	7	Yes	Yes	Yes	0F to 180F
2-1452	B4500 CBS	0.340	350	10	10	10	8	Yes	Yes	Yes	0F to 180F
5-2335	2 Ply 220 1/16 X 1/16 M-MOR-SC	0.215	190	16	14	12	6	Yes	Yes	Yes	0F to 250F
5-2731	2 Ply 220 3/16 x 1/16 SBR	0.360	190	16	14	12	6	No	No	No	0F to 250F
5-3335	3 Ply 330 1/16 X 1/16 M-MOR-SC	0.300	280	18	16	14	8	Yes	Yes	Yes	0F to 250F
5-3731	3 Ply 330 3/16 x 1/16 SBR	0.410	280	18	16	14	8	No	No	No	0F to 250F
5-4831	4 Ply 440 1/4 x 1/16 SBR	0.500	370	24	20	18	9	No	No	No	0F to 250F
5-2733	2 Ply 220 3/16 x 1/16 High Temp	0.360	190	16	14	12	6	No	No	No	-20F to 400F
5-3733	3 Ply 220 3/16 x 1/16 High Temp	0.410	280	18	16	14	8	No	No	No	-20F to 400F
5-2734	2 Ply 220 3/16 x 1/16 Hot Asphalt	0.360	190	16	14	12	6	No	No	Yes	-20F to 250F
5-3734	3 Ply 220 3/16 x 1/16 Hot Asphalt	0.410	280	18	16	14	8	No	No	Yes	-20F to 250F