


Phone: 800-253-6300
Fax: 201-337-6540
mulhernbelting.com
sales@mulhernbelting.com

Part Number 5-2532

2 PLY 220 3/16" X 1/16" MOR

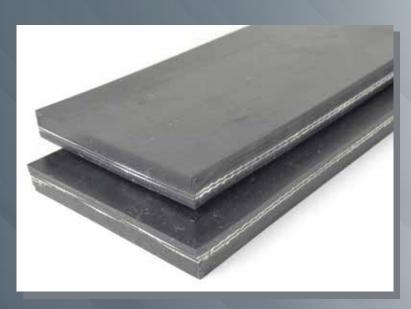

Color: Black

Nominal OAG: .360 +/- .030

Plies: 2

Fabric: Polyester/Nylon

Minimum Pulley Diameter: 16"

Top Surface: 3/16"
Bottom Surface: 1/16"

Compound: MOR

Work Tension: 220 lbs. PIW Elongation: less than 4% Weight P.I.W. / Ft: .200 lbs.

Working Temperature: -20F to 200F Joining Method: Lap Splice/Lacing

Mulhern Belting's 5-2532 features a smooth top and bottom surface. The heavy cover and high strength synthetic fabric results in a long wearing, mildew and rot resistant, low stretch belt. This belt is moderately oil resistant and is popular in conveying oily grain, wood chips or any other oily material.







- Service
- In-House Fabrication
- Multiple Stocking Locations
- On-Time Delivery
- Quality





Lacing

The complete Flexco line of products: Standard Lacing; Recessed Lacing; Hidden Lacing; Cover Flap Lacing; Plastic Rivet Lacing; Plastic Spiral Lacing



Endless

Complete Thermoplastic and Rubber Vulcanization: Lap Splices; Finger Splices; Double Finger Splices; Skived Splices; Stitched Reinforcement; Prepared Ends



Thermoplastic Profiles

Tee Cleats; Beefy Cleats; Scoop Cleats; Thin Line Cleats; Fabric Reinforced Cleats; Curved Cleat Patterns; Chevron Cleat Patterns; V-Guides; Flanges; Lugs; Sidewall with and without a base



Hot-Molded Rubber Profiles

Sidewall; Tee Cleats; SI Cleats; Scoop Cleats; Lugs; V-Guides; Flanges; Chevron Patterns; Bucket Patterns; Versa Patterns



Specialty Fabrications

Longitudinal Splicing; Covered Timing Belts and V-Belts; APC Belts; Capped Edges; Pulley Lagging; Loop Belts; Teflon Fiberglass Mesh Belts; Grooved and Beveled Belts; Splice Kits



Hole Punching

Punching for Bucket Elevators or Perforations

CONTACT US FOR A QUOTE TODAY! WWW.MULHERNBELTING.COM



Phone: 1-800-253-6300 Fax: 1-201-337-6540

sales@mulhernbelting.com