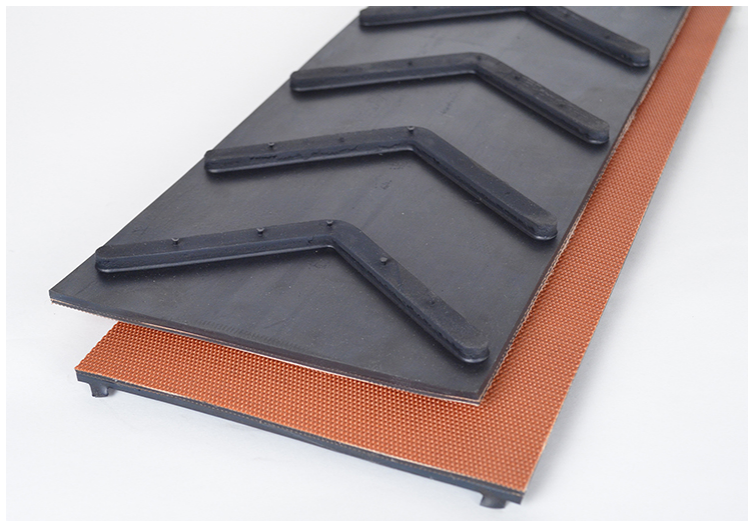


**Mulhern Belting, Inc**

Phone: 800-253-6300

Fax: 201-337-6540

Web: <http://www.mulhernbelting.com>Email: sales@mulhernbelting.com**Part Number: 5-7502****Color:** Black**Nominal OAG:** 0.475" +/- +/- .030**Recessed OAG:** 0.225" +/- N/A**Plies:** 2**Fabric:** Polyester/Nylon**Minimum Pulley Diameter:** See Chart Below**Top Surface:** 1/4" Chevron Profile**Bottom Surface:** Bare**Compound:** MOR**Work Tension:** 220 lbs. PIW**Elongation:** Less than 3%**Weight P.I.W. / Ft.:** .126 lbs/PIW**Working Temperature:** -20F to 200F**Joining Method:****Description: 220 1/8 x Bare Cleated Incline MOR**

Features: 5-7502 features a 1/4" high, 6" wide chevron profile in a staggered pattern. The OAG includes the profile. Use the Recessed OAG for the Lacing Recommendation.


Applications: 2 Ply 1/8" x Bare Cleated Incline MOR is used in bulk conveying where oil is a concern. This is a popular specification on Diamond Z grinders and in the recycling industry.

Heavy Rubber Minimum Recommended Pulley Diameters

Tension Rating	2 Ply/150 lbs.	2 Ply/220 lbs.	3 Ply/330 lbs.	3 Ply/600 lbs.	4 Ply/440 lbs.
Over 80%	16"	16"	18"	30"	24"
60%-80%	14"	14"	16"	24"	20"
40%-60%	12"	12"	14"	20"	18"
Below 40%, tails, snubs	10"	10"	12"	18"	16"

Mulhern Belting Inc.

Additional Photos:

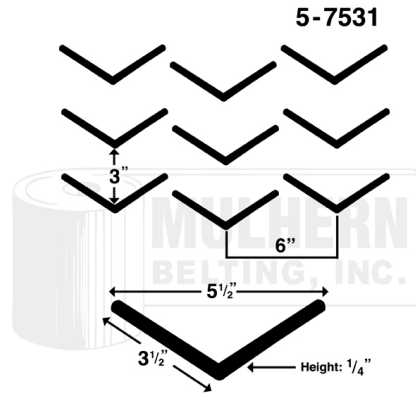

*All values are approximate. Not to be used for calculation purposes.

Mulhern Belting, Inc.
Phone: 800-253-6300 Fax: 201-337-6542
sales@mulhernbelting.com
www.mulhernbelting.com