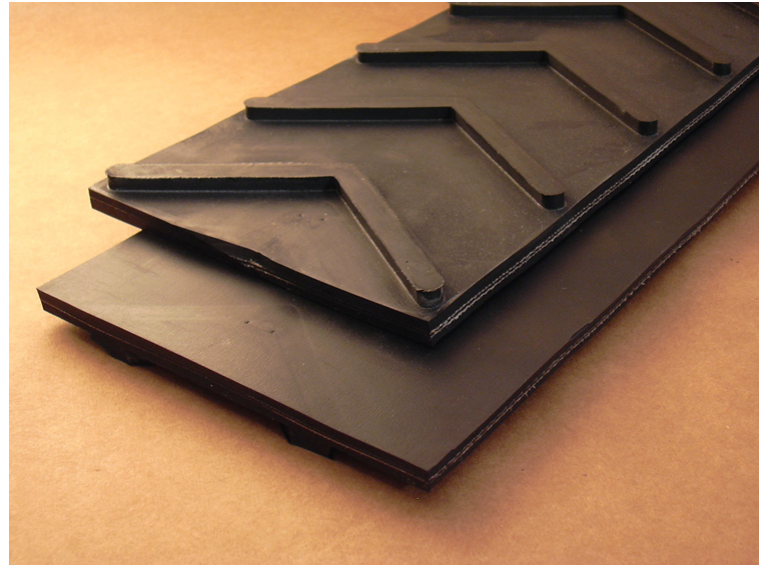


**Mulhern Belting, Inc**

Phone: 800-253-6300

Fax: 201-337-6540

Web: <http://www.mulhernbelting.com>Email: sales@mulhernbelting.com**Part Number: 5-7532****Color:** Black**Nominal OAG:** 0.570" +/- .030**Recessed OAG:** 0.325" +/- N/A**Plies:** 2**Fabric:** Polyester**Minimum Pulley Diameter:** See Chart Below**Top Surface:** 1/4" Chevron Profile**Bottom Surface:** 3/32" Cover**Compound:** MOR**Work Tension:** 220 lbs. PIW**Elongation:** Less than 3%**Weight P.I.W. / Ft.:** .214 lbs.**Working Temperature:** -20F to 200F**Joining Method:** Lap Splice/Lacing**Description: 220 1/8 x 3/32 Cleated Incline MOR**

Features: 5-7532 features a 1/4" high, 6" wide chevrons profile in a staggered pattern. The compound is MOR. The OAG includes the profile. Use Recessed OAG for Lacing Recommendation.


Applications: 220 1/8 x 3/32 Cleated Incline MOR is popular carrying bulk grain as well as gravel and crushed stone. It is used on road planners.

Heavy Rubber Minimum Recommended Pulley Diameters

Tension Rating	2 Ply/150 lbs.	2 Ply/220 lbs.	3 Ply/330 lbs.	3 Ply/600 lbs.	4 Ply/440 lbs.
Over 80%	16"	16"	18"	30"	24"
60%-80%	14"	14"	16"	24"	20"
40%-60%	12"	12"	14"	20"	18"
Below 40%, tails, snubs	10"	10"	12"	18"	16"

Mulhern Belting Inc.

Additional Photos:

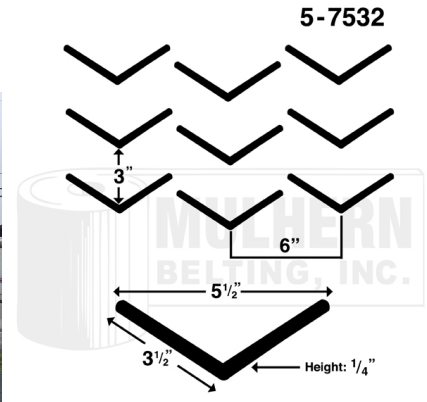

*All values are approximate. Not to be used for calculation purposes.

Mulhern Belting, Inc.
Phone: 800-253-6300 Fax: 201-337-6542
sales@mulhernbelting.com
www.mulhernbelting.com