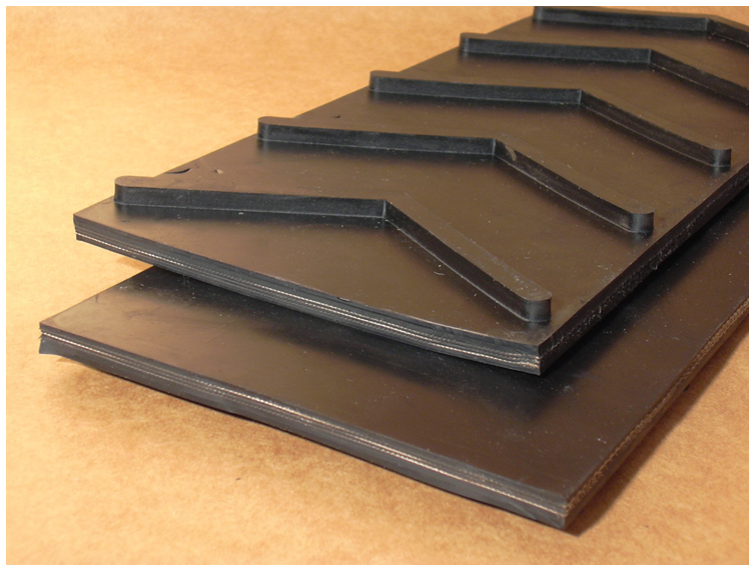


**Mulhern Belting, Inc**

Phone: 800-253-6300

Fax: 201-337-6540

Web: <http://www.mulhernbelting.com>Email: sales@mulhernbelting.com**Part Number: 5-8531****Color:** Black**Nominal OAG:** 0.595" +/- .040**Recessed OAG:** 0.350" +/- N/A**Plies:** 3**Fabric:** Polyester/Nylon**Minimum Pulley Diameter:** See Chart Below**Top Surface:** 1/4" Chevron Profile**Bottom Surface:** 1/16" Smooth Cover**Compound:** SBR**Work Tension:** 330 lbs. PIW**Elongation:** Less than 3%**Weight P.I.W. / Ft.:** .225 lbs. PIW**Working Temperature:** -25F to 250F**Joining Method:** Lap Splice; Lacing**Description: 330 1/8 x 1/16 Cleated Incline SBR**

Features: 5-8531 features 1/4" high, 6" wide chevron profiles in a staggered pattern. The OAG includes the profile. Use Recessed OAG for Lacing Recommendation.


Applications: 330 1/8 x 1/16 Cleated Incline SBR is a popular bulk conveying belt.

Heavy Rubber Minimum Recommended Pulley Diameters

Tension Rating	2 Ply/150 lbs.	2 Ply/220 lbs.	3 Ply/330 lbs.	3 Ply/600 lbs.	4 Ply/440 lbs.
Over 80%	16"	16"	18"	30"	24"
60%-80%	14"	14"	16"	24"	20"
40%-60%	12"	12"	14"	20"	18"
Below 40%, tails, snubs	10"	10"	12"	18"	16"

Mulhern Belting Inc.

Additional Photos:

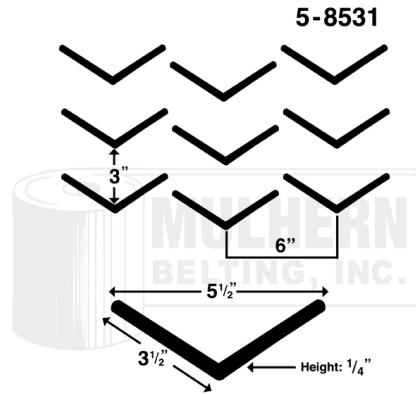

*All values are approximate. Not to be used for calculation purposes.

Mulhern Belting, Inc.
Phone: 800-253-6300 Fax: 201-337-6542
sales@mulhernbelting.com
www.mulhernbelting.com