



(800) 253-6300

sales@mulhernbelting.com

www.mulhernbelting.com

1-1004: U2W Poli-Glide Standard

Color: White

Plies: 2

Nom. OAG: 0.06" +/- 0.015"

Fabric: Monofilament

Top Surface: Smooth Cover

Bottom Surface: Bare

Compound: Poly Urethane

Work Tension: 50 lbs./PIW

Elongation: Less than 1%

Weight: 0.023 lbs./PIW

Minimum Pulley: 0.1"

Backflex Min. Pulley Dia.: 0.2"

Working Temp. (F): -4 to 180

Max. Stocked Width: 72"

Attributes: Cross Rigid, Abrasion Resistant, FDA Compliant, Oil Resistant, Sliderbed Suitable

Hardness: 90a

Features: This belt is a lightweight 2 ply monofilament construction that will negotiate small pulleys. The urethane compound is oil, animal fat and grease resistant. It is easy to clean and will lay flat. Refer to the chemical resistance chart when choosing a cleaning solution. This belt is formulated for use in metal detectors and is not anti-static. U2W Poli-Glide Standard is used in candy, chocolate and confectionery processing. It is also used in many medium food processing applications such as the cheese, bakery, fish, meat, poultry and vegetable industries. It is also metal detector compliant.






Splicing Instructions

Part Number: 1-1004

Part Description: U2W Poli-Glide Standard

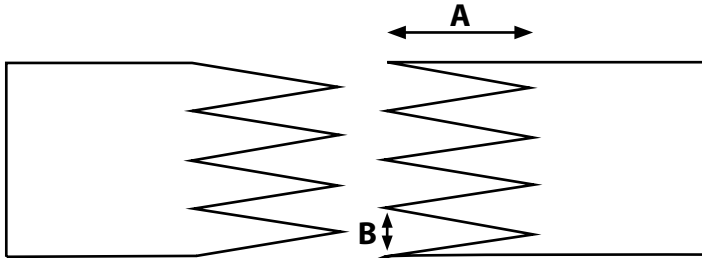

Finger Length (A):

Finger Width (B):

	Imperial	Metric
Finger Length (A):	3"	76 mm
Finger Width (B):	3/4"	19 mm

Water Cooled

Hi-Speed

	Imperial	Metric	Imperial	Metric
Upper Platen Temp:	320 ° F	160 ° C	320 ° F	160 ° C
Bottom Platen Temp:	300 ° F	149 ° C	320 ° F	160 ° C
Pressure:	30 PSI	2.1 bar	36 PSI	2.5 bar
Time:	03:00 m:s	03:00 m:s	03:00 m:s	03:00 m:s

Press Layout

Description

Part # to Order

	Top Heating Platen with equalizing plate	
	Silicone Paper	1020C
	Melttable Foil (optional)	8440C
	Belt	1-1004
	Silicone Paper	1020C
	Molleton Cloth	1023
	Bottom Heating Platen with equalizing plate	