



(800) 253-6300

sales@mulhernbelting.com

www.mulhernbelting.com

1-1005: U2W Poli-Glide 5M/2U/BU-A/S

Color: White

Plies: 2

Nom. OAG: 0.06" +/- 0.015"

Fabric: Monofilament

Top Surface: Smooth Cover

Bottom Surface: Bare

Compound: Poly Urethane

Work Tension: 50 lbs./PIW

Elongation: Less than 1%

Weight: 0.03 lbs./PIW

Minimum Pulley: 0.1"

Backflex Min. Pulley Dia.: 0.2"

Working Temp. (F): -4 to 180

Max. Stocked Width: 78.75"

Attributes: Abrasion Resistant, Anti-Static, Cross Rigid, FDA Compliant, Nosebar Suitable, Oil Resistant

Hardness: 90a

Features: This belt is a lightweight 2 ply monofilament construction that will negotiate small pulleys. The urethane compound is oil, animal fat and grease resistant. It is easy to clean and will lay flat. Refer to the chemical resistance chart when choosing a cleaning solution. This belt is anti-static. U2W Poli-Glide A/S is used in candy, chocolate and confectionery processing. It is also used in many medium food processing applications such as the cheese, bakery, fish, meat, poultry and vegetable industries.






Splicing Instructions

Part Number: 1-1005

Part Description: U2W Poli-Glide 5M/2U/BU-A/S

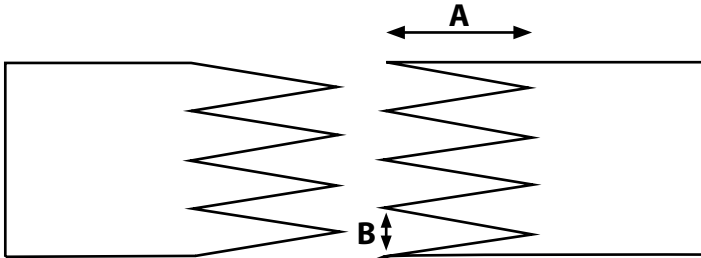

Finger Length (A):

Finger Width (B):

Imperial	Metric
3"	76 mm
3/4"	19 mm

Water Cooled

Hi-Speed

	Imperial	Metric	Imperial	Metric
Upper Platen Temp:	320 ° F	160 ° C	320 ° F	160 ° C
Bottom Platen Temp:	300 ° F	149 ° C	320 ° F	160 ° C
Pressure:	30 PSI	2.1 bar	36 PSI	2.5 bar
Time:	03:00 m:s	03:00 m:s	03:00 m:s	03:00 m:s

Press Layout

Description

Part # to Order

	Top Heating Platen with equalizing plate	
	Silicone Paper	1020C
	Meltable Foil (optional)	8440C
	Belt	1-1005
	Silicone Paper	1020C
	Molleton Cloth	1023
	Bottom Heating Platen with equalizing plate	