



(800) 253-6300

sales@mulhernbelting.com

www.mulhernbelting.com

1-1250: U2BL Poli-Glide 8M/2U/BU

Color: Blue

Plies: 2

Nom. OAG: 0.05" +/- 0.01"

Fabric: Polyester

Top Surface: Smooth

Bottom Surface: Bare

Compound: Poly Urethane

Work Tension: 126 lbs./PIW

Elongation: Less than 1%

Weight: 0.026 lbs./PIW

Minimum Pulley: 0.6"

Backflex Min. Pulley Dia.: 1"


Working Temp. (F): -4 to 212

Max. Stocked Width: 78.75"

Attributes: Abrasion Resistant, FDA Compliant,
Sliderbed Suitable, Anti-Static, Nosebar Suitable

Hardness: 90a

Features: 1-1250 is FDA compliant, has a non-adhesive cover, is abrasion resistant and has good edge wear. The unique blue color helps visibility on food inspection lines. U2BL Poli-Glide 8M/2U/BU is a good food application belt. It is used as an accumulation belt, a diverting belt, a dough belt and a general conveying belt in food applications.

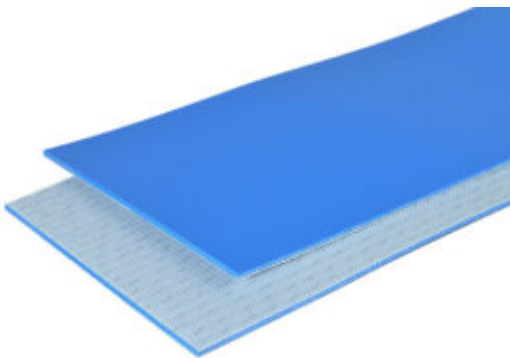




Splicing Instructions

Part Number: 1-1250

Part Description: U2BL Poli-Glide 8M/2U/BU

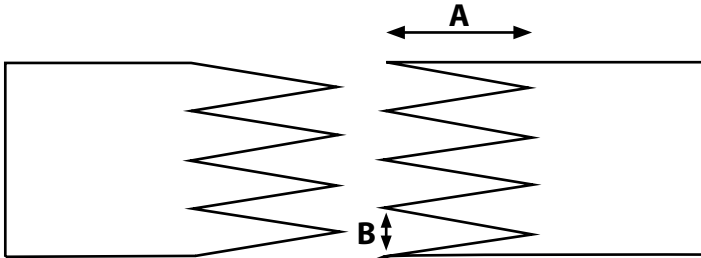

| | Imperial | Metric |
|---------------------------|----------|--------|
| Finger Length (A): | 3" | 76 mm |
| Finger Width (B): | 3/4" | 19 mm |

| | Water Cooled | | Hi-Speed | |
|----------------------------|--------------|-----------|-----------|-----------|
| | Imperial | Metric | Imperial | Metric |
| Upper Platen Temp: | 320 ° F | 160 ° C | 320 ° F | 160 ° C |
| Bottom Platen Temp: | 300 ° F | 149 ° C | 320 ° F | 160 ° C |
| Pressure: | 30 PSI | 2.1 bar | 36 PSI | 2.5 bar |
| Time: | 03:00 m:s | 03:00 m:s | 03:00 m:s | 03:00 m:s |

| Press Layout | Description | Part # to Order |
|--------------|---|-----------------|
| | Top Heating Platen with equalizing plate | |
| | Silicone Paper | 1020C |
| | Meltable Foil (optional) | 8441C |
| | Belt | 1-1250 |
| | Silicone Paper | 1020C |
| | Molleton Cloth | 1023 |
| | Bottom Heating Platen with equalizing plate | |