

1-2191: RAV2 W100 Tylertop

Color: White

Plies: 2

Nom. OAG: 0.115" +/- 0.015"

Fabric: Polyester

Top Surface: Tylerwire Impression **Bottom Surface:** Friction Surface

Compound: RAV

Work Tension: 100 lbs./PIW Elongation: Less than 2%

Weight: 0.06 lbs./PIW

Minimum Pulley: 1.5"

Backflex Min. Pulley Dia.: 2.25"


Working Temp. (F): 20 to 180

Max. Stocked Width: 72"

Attributes: FDA Compliant, Oil Resistant,

Sliderbed Suitable

Features: 1-2191 features the popular RAV compound with a tylerwire impression on the top surface. The belt is easy to clean, flexible, non-marking and is easy to fabricate. Refer to the Chemical Resistance Chart befor choosing a cleaning compound. RAV2 W100 Tylertop is used in food or other industrial application when the product must go up a slight incline or be pulled as in dough rolling. This belt is available with sealed edges to reduce carcass contamination.

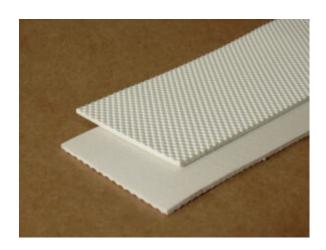




Splicing Instructions

Part Number: 1-2191 Part Description: RAV2 W100 Tylertop



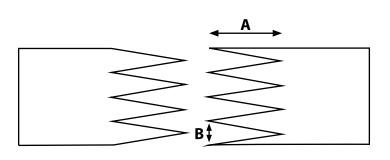

Finger Length (A):

Finger Width (B):

Imperial	Metric
3"	76 mm
3/4"	19 mm

Water Cooled

Hi-Speed

Upper Platen Temp:

Bottom Platen Temp:

Pressure:

Time:

Imperial	Metric	Imperial	Metric
340° F	171 ° C	330 ° F	166 ° C
340° F	171 ° C	330 ° F	166 ° C
50 PSI	3.4 bar	36 PSI	2.5 bar
01:00 m:s	01:00 m:s	03:00 m:s	03:00 m:s

Press Layout	Description	Part # to Order
	Top Heating Platen with equalizing plate	
	Impression Pad	
	Meltable Foil (optional)	8340C
	Belt	1-2191
	Teflon	6-3000
722	Bottom Heating Platen with equalizing plate	

Ph: (800) 253-6300 Fax: (201) 337-6540 sales@mulhernbelting.com www.mulhernbelting.com