



(800) 253-6300

sales@mulhernbelting.com

www.mulhernbelting.com

1-2931: RAV3 W140 COS

Color: White

Plies: 3

Nom. OAG: 0.141" +/- 0.02"

Fabric: Polyester

Top Surface: Smooth Cover (Dull Finish)

Bottom Surface: Friction Surface

Compound: RAV

Work Tension: 150 lbs./PIW

Elongation: Less than 2%

Weight: 0.08 lbs./PIW

Minimum Pulley: 2.5"


Backflex Min. Pulley Dia.: 3.75"

Working Temp. (F): 20 to 180

Max. Stocked Width: 72"

Attributes: FDA Compliant, Oil Resistant,
Sliderbed Suitable

Features: 1-2931 features the popular RAV compound on a low stretch, stable polyester carcass. The RAV compound blends the economical benefits of PVC and the universal benefits of NBR. RAV3 W140 COS can be used anywhere an oil-resistant medium duty food belt is needed. It is a good belt for nut and seed sorting, meat and poultry applications and in vegetable and fruit processing.

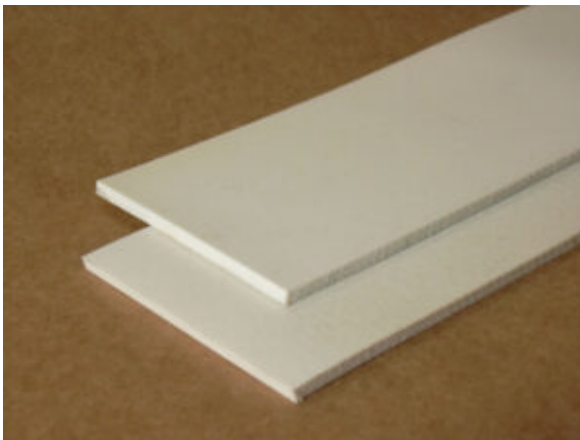




Splicing Instructions

Part Number: 1-2931

Part Description: RAV3 W140 COS

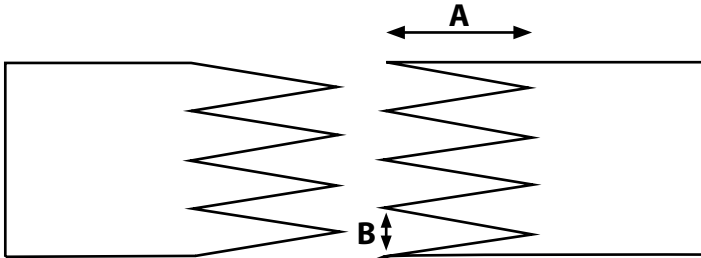

	Imperial	Metric
Finger Length (A):	3"	76 mm
Finger Width (B):	3/4"	19 mm

Water Cooled

Hi-Speed

	Imperial	Metric	Imperial	Metric
Upper Platen Temp:	340 ° F	171 ° C	330 ° F	166 ° C
Bottom Platen Temp:	340 ° F	171 ° C	330 ° F	166 ° C
Pressure:	50 PSI	3.4 bar	36 PSI	2.5 bar
Time:	01:00 m:s	01:00 m:s	03:00 m:s	03:00 m:s

Press Layout

Description

Part # to Order

	Top Heating Platen with equalizing plate	
	Silicone Paper	1020C
	Meltable Foil (optional)	8340C
	Belt	1-2931
	Silicone Paper	1020C
	Molleton Cloth	1023
	Bottom Heating Platen with equalizing plate	