



(800) 253-6300

sales@mulhernbelting.com

www.mulhernbelting.com

## 1-2971: R2W Poli-Glide 8M/10R/BR

**Color:** White

**Plies:** 2

**Nom. OAG:** 0.09" +/- 0.02"

**Fabric:** Monofilament

**Top Surface:** Matte

**Bottom Surface:** Bare

**Compound:** RAV

**Work Tension:** 100 lbs./PIW

**Elongation:** Less than 2%

**Weight:** 0.05 lbs./PIW

**Minimum Pulley:** 2"


**Backflex Min. Pulley Dia.:** 3"

**Working Temp. (F):** 20 to 180

**Max. Stocked Width:** 78.75"

**Attributes:** Anti-Static, Cross Rigid, FDA Compliant, Sliderbed Suitable, Oil Resistant

**Features:** This belt features the popular RAV compound in a low stretch, stable and static dissipating carcass. The RAV compound blends the economical benefits of PVC and the universal benefits of NBR. This belt is anti-static. Refer to the chemical resistance chart when choosing a cleaning solution. R2W Poli-Glide 8M/10R/BR can be used almost anywhere a light duty food belt is needed. The belt qualities include oil, grease and moisture resistance. The thermoplastic component lends itself to a wide range of fabrications.

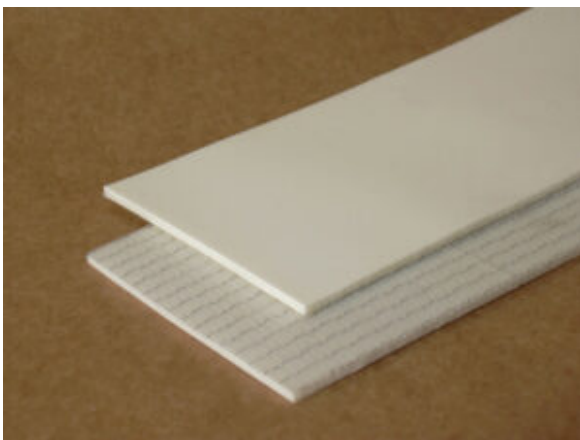




# Splicing Instructions

**Part Number:** 1-2971

**Part Description:** R2W Poli-Glide 8M/10R/BR

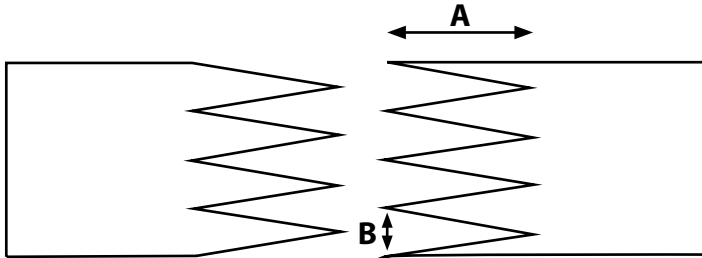

**Finger Length (A):**

**Finger Width (B):**

Imperial	Metric
3"	76 mm
3/4"	19 mm

### Water Cooled

### Hi-Speed

	Imperial	Metric	Imperial	Metric
<b>Upper Platen Temp:</b>	340 °F	171 °C	330 °F	166 °C
<b>Bottom Platen Temp:</b>	340 °F	171 °C	330 °F	166 °C
<b>Pressure:</b>	50 PSI	3.4 bar	36 PSI	2.5 bar
<b>Time:</b>	01:00 m:s	01:00 m:s	03:00 m:s	03:00 m:s

### Press Layout

### Description

### Part # to Order

	Top Heating Platen with equalizing plate	
	Silicone Paper	1020C
	Meltable Foil (optional)	8340C
	Belt	1-2971
	Silicone Paper	1020C
	Molleton Cloth	1023
	Bottom Heating Platen with equalizing plate	