



(800) 253-6300

sales@mulhernbelting.com

www.mulhernbelting.com

2-1121: B1200 COS

Color: Black

Plies: 1

Nom. OAG: 0.135" +/- 0.015"

Fabric: Interwoven Polyester

Top Surface: Smooth

Bottom Surface: Brushed

Compound: PVC

Work Tension: 120 lbs./PIW

Elongation: Less than 3%

Weight: 0.07 lbs./PIW

Minimum Pulley: 3"

Backflex Min. Pulley Dia.: 4.5"

Working Temp. (F): 0 to 180


Max. Stocked Width: 84"

Attributes: Sliderbed Suitable

Top Cover Coefficient of Friction: 0.8

Bottom Cover Coefficient of Friction: 0.5

Features: 2-1121 features the popular interwoven carcass and a smooth PVC top cover. The bottom cover is brushed clean to lower the coefficient of friction. It offers high strength, low stretch and high lace retention. B1200 COS is a medium duty general purpose conveyor belt that can be used in most industries.

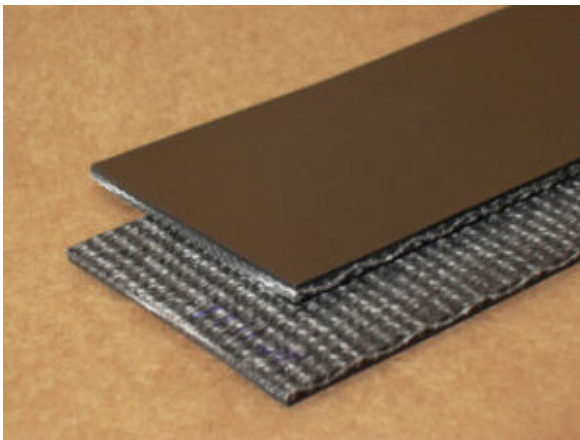




Splicing Instructions



Part Number: 2-1121

Part Description: B1200 COS

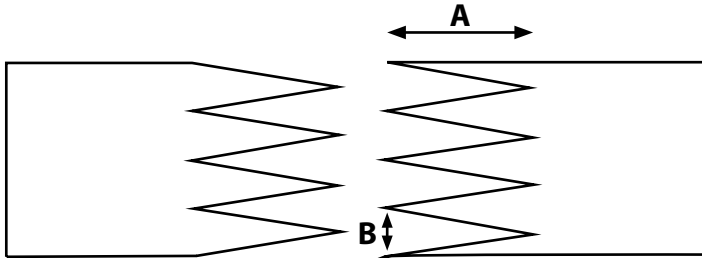

	Imperial	Metric
Finger Length (A):	3"	76 mm
Finger Width (B):	3/4"	19 mm

Water Cooled

Hi-Speed

	Imperial	Metric	Imperial	Metric
Upper Platen Temp:	340 ° F	171 ° C	340 ° F	171 ° C
Bottom Platen Temp:	340 ° F	171 ° C	340 ° F	171 ° C
Pressure:	50 PSI	3.4 bar	36 PSI	2.5 bar
Time:	01:00 m:s	01:00 m:s	03:00 m:s	03:00 m:s

Press Layout	Description	Part # to Order
	Top Heating Platen with equalizing plate	
	Teflon	6-3000
	Meltable Foil (optional)	8341C
	Belt	2-1121
	Teflon	6-3000
	Bottom Heating Platen with equalizing plate	

For high stress applications splice with reinforcing fabric.