



(800) 253-6300

sales@mulhernbelting.com

www.mulhernbelting.com

2-1911: RAV2 B100 COS

Color: Black

Plies: 2

Nom. OAG: 0.11" +/- 0.02"

Fabric: Polyester

Top Surface: Smooth Cover (Satin)

Bottom Surface: Brushed

Compound: RAV

Work Tension: 100 lbs./PIW

Elongation: Less than 2%

Weight: 0.065 lbs./PIW

Minimum Pulley: 2"


Backflex Min. Pulley Dia.: 3"

Working Temp. (F): 20 to 180

Max. Stocked Width: 78.75"

Attributes: Oil Resistant, Sliderbed Suitable

Features: 2-1911 features the popular RAV compound on a low stretch, stable polyester carcass. The RAV compound blends the economical benefits of PVC with the universal benefits of NBR. RAV2 B100 COS/Brushed can be used anywhere a light duty general purpose belt is needed. The belt's qualities include oil, grease and moistures resistance. This belt lends itself to all types of fabrication.

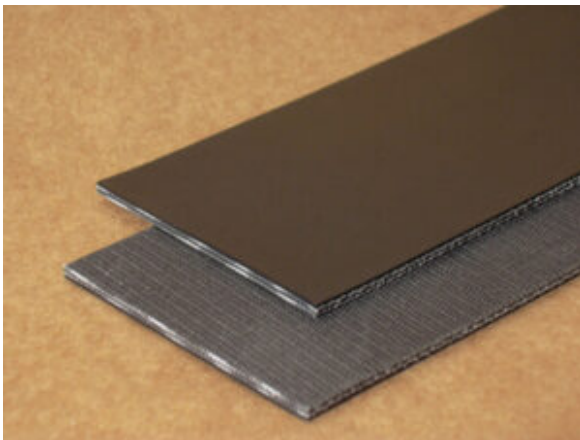




Splicing Instructions



Part Number: 2-1911

Part Description: RAV2 B100 COS

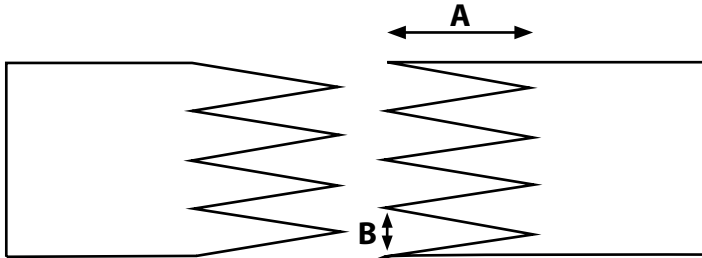

	Imperial	Metric
Finger Length (A):	3"	76 mm
Finger Width (B):	3/4"	19 mm

	Water Cooled		Hi-Speed	
	Imperial	Metric	Imperial	Metric
Upper Platen Temp:	340 ° F	171 ° C	340 ° F	171 ° C
Bottom Platen Temp:	340 ° F	171 ° C	340 ° F	171 ° C
Pressure:	50 PSI	3.4 bar	36 PSI	2.5 bar
Time:	01:00 m:s	01:00 m:s	03:00 m:s	03:00 m:s

Press Layout	Description	Part # to Order
	Top Heating Platen with equalizing plate	
	Teflon	6-3000
	Meltable Foil (optional)	8341C
	Belt	2-1911
	Teflon	6-3000
	Bottom Heating Platen with equalizing plate	

For high stress applications splice with reinforcing fabric.