



(800) 253-6300

sales@mulhernbelting.com

www.mulhernbelting.com

2-1921: RAV3 B150 COS

Color: Black

Plies: 3

Nom. OAG: 0.14" +/- 0.015"

Fabric: Polyester

Top Surface: Smooth Cover (Satin)

Bottom Surface: Friction Surface

Compound: RAV

Work Tension: 150 lbs./PIW

Elongation: Less than 2%

Weight: 0.08 lbs./PIW

Minimum Pulley: 2.5"


Backflex Min. Pulley Dia.: 3.75"

Working Temp. (F): 20 to 180

Max. Stocked Width: 78.75"

Attributes: Oil Resistant, Sliderbed Suitable

Features: This belt features the popular RAV compound in a low stretch, stable polyester carcass. The RAV compound blends the economical benefits of PVC and the universal benefits of NBR. RAV3 B150 COS can be used almost anywhere a medium duty general purpose belt is needed. The belt qualities include oil, grease and moisture resistance. The thermoplastic component lends itself to all types of fabrication.

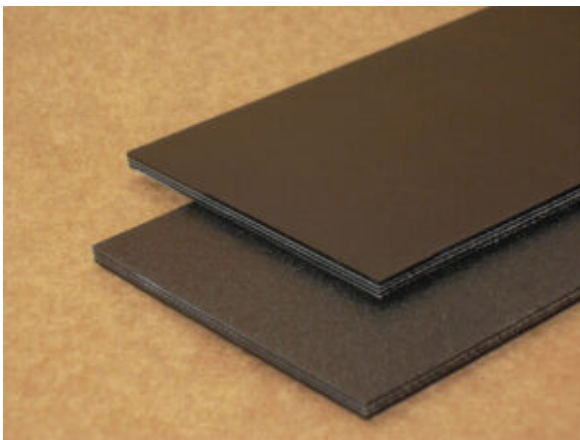




Splicing Instructions



Part Number: 2-1921

Part Description: RAV3 B150 COS

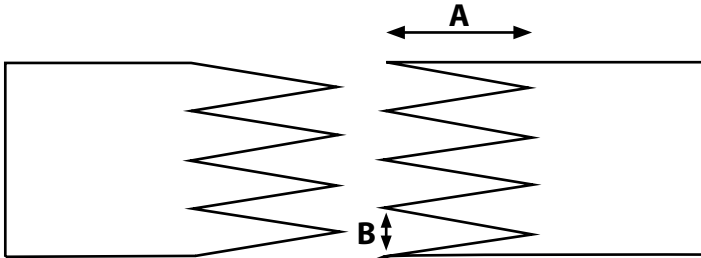

| | Imperial | Metric |
|---------------------------|----------|--------|
| Finger Length (A): | 3" | 76 mm |
| Finger Width (B): | 3/4" | 19 mm |

| | Water Cooled | | Hi-Speed | |
|----------------------------|--------------|-----------|-----------|-----------|
| | Imperial | Metric | Imperial | Metric |
| Upper Platen Temp: | 340 ° F | 171 ° C | 340 ° F | 171 ° C |
| Bottom Platen Temp: | 340 ° F | 171 ° C | 340 ° F | 171 ° C |
| Pressure: | 50 PSI | 3.4 bar | 36 PSI | 2.5 bar |
| Time: | 01:00 m:s | 01:00 m:s | 03:00 m:s | 03:00 m:s |

| Press Layout | Description | Part # to Order |
|--------------|---|-----------------|
| | Top Heating Platen with equalizing plate | |
| | Teflon | 6-3000 |
| | Meltable Foil (optional) | 8341C |
| | Belt | 2-1921 |
| | Teflon | 6-3000 |
| | Bottom Heating Platen with equalizing plate | |

For high stress applications splice with reinforcing fabric.