



(800) 253-6300

sales@mulhernbelting.com

www.mulhernbelting.com

## 2-2202: W2000 CBS

**Color:** White

**Plies:** 1

**Nom. OAG:** 0.25" +/- 0.02"

**Fabric:** Interwoven Polyester

**Top Surface:** Smooth PVC

**Bottom Surface:** Smooth Cover (Dull Finish)

**Compound:** PVC

**Work Tension:** 200 lbs./PIW

**Weight:** 0.13 lbs./PIW

**Minimum Pulley:** 5"

**Backflex Min. Pulley Dia.:** 7.5"

**Working Temp. (F):** 0 to 180

**Max. Stocked Width:** 72"

**Attributes:** FDA Compliant, Fire Retardant,  
Static Conductive to  $< 3 \times 10^8$  ohms, OSHA 29  
CFR

**Features:** 2-2202 features a smooth oil resistant PVC cover with a tightly interwoven polyester carcass. This belt will lie flat and resist stretch. It is Oil Resistant, Fire Retardant, Static Conductive to OSHA 29 CFR and FDA compliant. Please refer to the Chemical Resistance Chart when choosing a cleaning solution. W2000 CBS can be used as a general purpose food handling belt. It can be used for light duty bucket elevators. Depending on conditions it can be used in chicken and meat applications. Do not use this belt in slider bed applications.






# Splicing Instructions



**Part Number:** 2-2202

**Part Description:** W2000 CBS

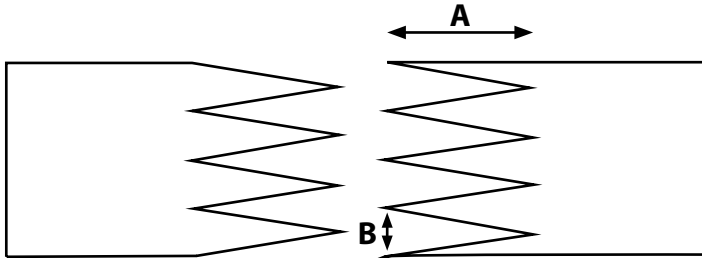

**Finger Length (A):**

**Finger Width (B):**

	Imperial	Metric
Finger Length (A):	3"	76 mm
Finger Width (B):	3/4"	19 mm

## Water Cooled

## Hi-Speed

	Imperial	Metric	Imperial	Metric
<b>Upper Platen Temp:</b>	335 ° F	168 ° C	335 ° F	168 ° C
<b>Bottom Platen Temp:</b>	335 ° F	168 ° C	335 ° F	168 ° C
<b>Pressure:</b>	50 PSI	3.4 bar	36 PSI	2.5 bar
<b>Time:</b>	02:00 m:s	02:00 m:s	05:00 m:s	05:00 m:s

## Press Layout

## Description

## Part # to Order

	Top Heating Platen with equalizing plate	
	Teflon	6-3000
	Meltable Foil (optional)	8340C
	Belt	2-2202
	Meltable Foil (optional)	8340C
	Teflon	6-3000
	Bottom Heating Platen with equalizing plate	

For high stress applications splice with reinforcing fabric.