



(800) 253-6300

sales@mulhernbelting.com

www.mulhernbelting.com

2-2202: W2000 CBS

Color: White

Plies: 1

Nom. OAG: 0.25" +/- 0.02"

Fabric: Interwoven Polyester

Top Surface: Smooth PVC

Bottom Surface: Smooth Cover (Dull Finish)

Compound: PVC

Work Tension: 200 lbs./PIW

Weight: 0.13 lbs./PIW

Minimum Pulley: 5"

Backflex Min. Pulley Dia.: 7.5"

Working Temp. (F): 0 to 180

Max. Stocked Width: 72"

Attributes: FDA Compliant, Fire Retardant, Static Conductive to $< 3 \times 10^8$ ohms, OSHA 29 CFR

Features: 2-2202 features a smooth oil resistant PVC cover with a tightly interwoven polyester carcass. This belt will lie flat and resist stretch. It is Oil Resistant, Fire Retardant, Static Conductive to OSHA 29 CFR and FDA compliant. Please refer to the Chemical Resistance Chart when choosing a cleaning solution. W2000 CBS can be used as a general purpose food handling belt. It can be used for light duty bucket elevators. Depending on conditions it can be used in chicken and meat applications. Do not use this belt in slider bed applications.






Splicing Instructions

Part Number: 2-2202

Part Description: W2000 CBS

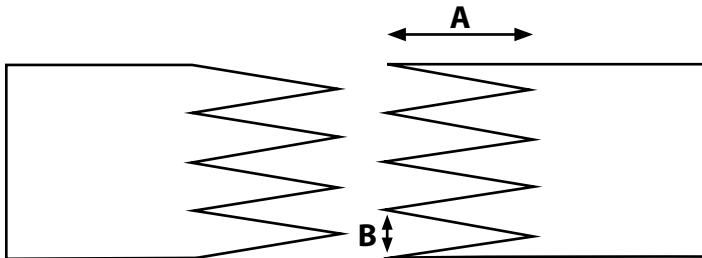

Finger Length (A):

Finger Width (B):

Imperial	Metric
3"	76 mm
3/4"	19 mm

Water Cooled

Hi-Speed

	Imperial	Metric	Imperial	Metric
Upper Platen Temp:	335 ° F	168 ° C	335 ° F	168 ° C
Bottom Platen Temp:	335 ° F	168 ° C	335 ° F	168 ° C
Pressure:	50 PSI	3.4 bar	36 PSI	2.5 bar
Time:	02:00 m:s	02:00 m:s	05:00 m:s	05:00 m:s

Press Layout

Description

Part # to Order

	Top Heating Platen with equalizing plate	
	Teflon	6-3000
	Meltable Foil (optional)	8340C
	Belt	2-2202
	Meltable Foil (optional)	8340C
	Teflon	6-3000
	Bottom Heating Platen with equalizing plate	

For high stress applications splice with reinforcing fabric.