



(800) 253-6300

sales@mulhernbelting.com

www.mulhernbelting.com

3-3513: W1200 Crescent Top - MOR

Color: White

Plies: 1

Nom. OAG: 0.22" +/- 0.03"

Recessed OAG: 0.14"

Fabric: Interwoven Polyester

Top Surface: Crescent Impression

Bottom Surface: Brushed

Compound: RAV

Work Tension: 120 lbs./PIW

Elongation: Less than 2%

Weight: 0.08 lbs./PIW

Minimum Pulley: 2"

Backflex Min. Pulley Dia.: 3"

Working Temp. (F): 0 to 180


Max. Stocked Width: 72"

Attributes: Oil Resistant, Sliderbed
Suitable, Troughable

Top Cover Coefficient of Friction: 1.3

Bottom Cover Coefficient of Friction:
0.8

Features: 3-3513 features the popular interwoven carcass with an 1/8" high half moon (crescent) impression. The belt has a brushed bottom for a low coefficient of friction. The PVC compound is oil resistant. NOTE--The crescent impression must be recessed to use lacing. Use Recessed OAG for Lacing Recommendation. W1200 Crescent Top is very popular in the agricultural industry for the movement of bulk materials and in the post office to move small packages.

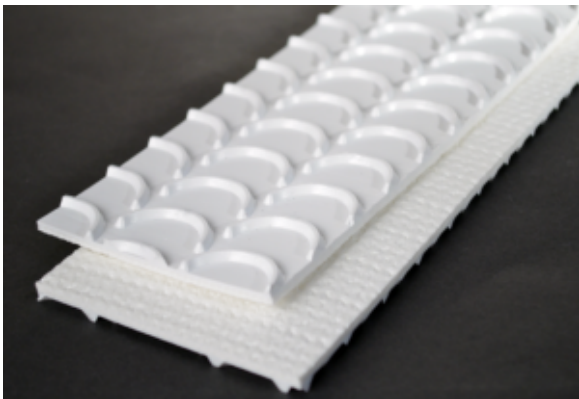




Splicing Instructions

Part Number: 3-3513

Part Description: W1200 Crescent Top - MOR

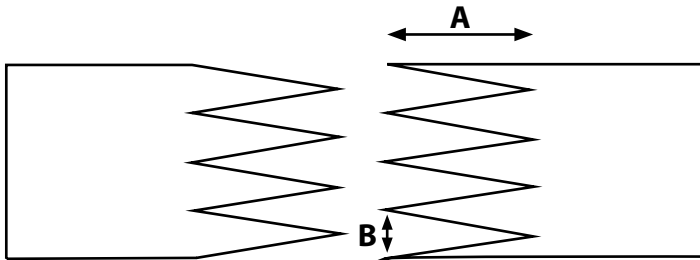

Finger Length (A):

Finger Width (B):

Imperial	Metric
3"	76 mm
3/4"	19 mm

Water Cooled

Hi-Speed

Upper Platen Temp:

Bottom Platen Temp:

Pressure:

Time:

	Imperial	Metric	Imperial	Metric
Upper Platen Temp:	340 ° F	171 ° C	330 ° F	166 ° C
Bottom Platen Temp:	340 ° F	171 ° C	330 ° F	166 ° C
Pressure:	50 PSI	3.4 bar	36 PSI	2.5 bar
Time:	01:00 m:s	01:00 m:s	03:00 m:s	03:00 m:s

Press Layout

Description

Part # to Order

	Top Heating Platen with equalizing plate	
	Impression Pad	
	Meltable Foil (optional)	8340C
	Belt	3-3513
	Teflon	6-3000
	Bottom Heating Platen with equalizing plate	

For high stress applications splice with reinforcing fabric.