



(800) 253-6300

sales@mulhernbelting.com

www.mulhernbelting.com

2-2191: RAV2 B100 Tylertop

Color: Black

Plies: 2

Nom. OAG: 0.125" +/- 0.02"

Fabric: Polyester

Top Surface: Tylerwire Impression

Bottom Surface: Friction Surface

Compound: RAV

Work Tension: 100 lbs./PIW

Elongation: Less than 2%

Weight: 0.06 lbs./PIW

Minimum Pulley: 1.5"


Backflex Min. Pulley Dia.: 2.25"

Working Temp. (F): 20 to 180

Max. Stocked Width: 72"

Attributes: Oil Resistant, Sliderbed Suitable

Features: 2-2191 features the popular RAV compound on a low stretch and stable polyester carcass. The RAV compound blends the economical benefits of PVC with the universal benefits of NBR. RAV2 B100 Tylertop can be used anywhere a light duty general purpose belt is needed. The tylerwire impression is excellent for conveying products up a moderate incline. This thermoplastic belt lends itself to all types of fabrication.

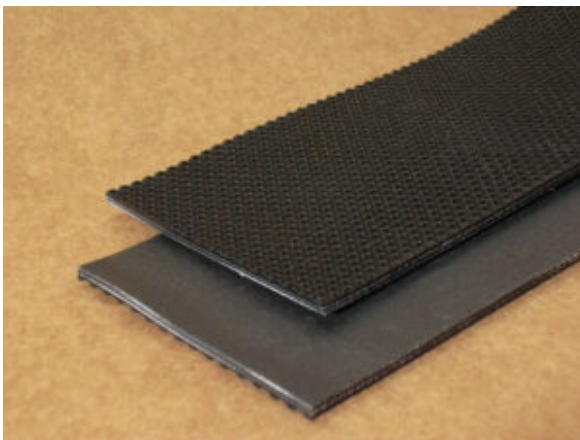




Splicing Instructions



Part Number: 2-2191

Part Description: RAV2 B100 Tylertop

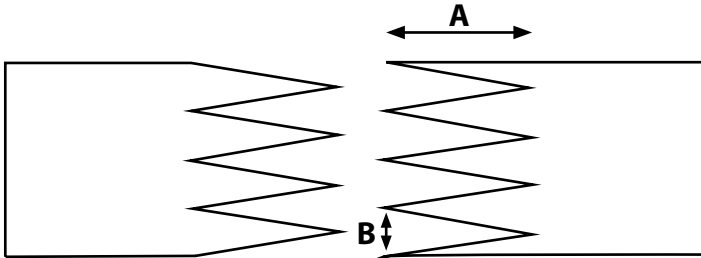

	Imperial	Metric
Finger Length (A):	3"	76 mm
Finger Width (B):	3/4"	19 mm

Water Cooled

Hi-Speed

	Imperial	Metric	Imperial	Metric
Upper Platen Temp:	340 ° F	171 ° C	340 ° F	171 ° C
Bottom Platen Temp:	340 ° F	171 ° C	340 ° F	171 ° C
Pressure:	50 PSI	3.4 bar	36 PSI	2.5 bar
Time:	01:00 m:s	01:00 m:s	03:00 m:s	03:00 m:s

Press Layout

Description

Part # to Order

	Top Heating Platen with equalizing plate	
	Impression Pad	
	Meltable Foil (optional)	8341C
	Belt	2-2191
	Teflon	6-3000
	Bottom Heating Platen with equalizing plate	